



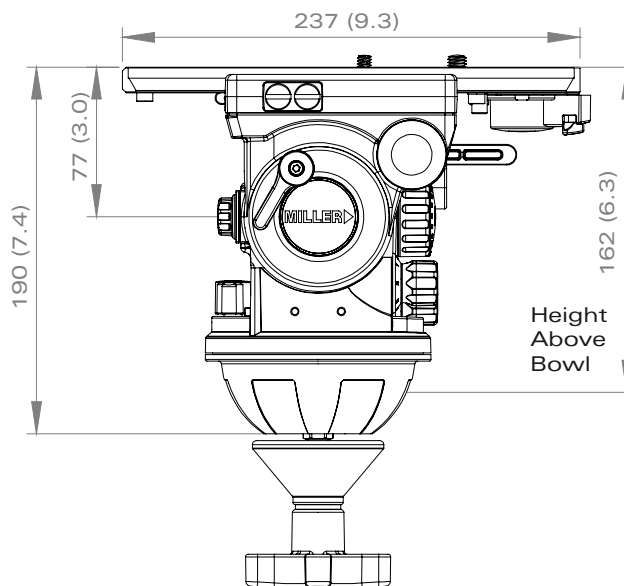

## FEATURES

- Wide payload range 1-19kg (2.2 - 41.8lbs).
- 5 selectable drag positions (pan and tilt) + 0.
- 16 position CB Plus™ counterbalance system.
- Quick release, 120mm sliding camera platform with standard camera plate (euro).
- Fluid drag system with smooth start and soft stop technology & balanced diagonal transitions.
- Controls “all in one location” design for fast, easy and practical use.
- Illuminated bubble level and pan-tilt drag controls.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Removable ball level stud for flat base mounting (sliders) with 3/8” screw hole.
- Mitchell base adaptable.
- Robust construction for rugged outdoor shooting conditions.
- Optional second pan handle mount.
- Side mounting points for viewfinders and accessories.
- Three-year warranty.

The Lightweight 100mm Choice For ENG

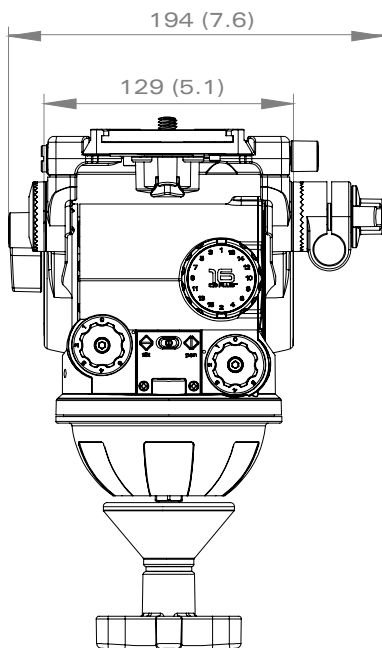

## 1072 ARROWX 3 FLUID HEAD



|                    |                                                                              |
|--------------------|------------------------------------------------------------------------------|
| Weight:            | 3.1 kg (6.8 lbs)                                                             |
| Payload range:     | 1.0 - 19.0 kg (2.2 - 41.8 lbs)                                               |
| Pan/tilt drag:     | 5 selectable fluid drag positions + 0                                        |
| Counterbalance:    | 16 selectable positions                                                      |
| Pan/tilt lock:     | Positive lock caliper brake system                                           |
| Tilt range:        | + 90° / -75°                                                                 |
| Pan range:         | 360°                                                                         |
| Camera platform:   | Quick release camera plate (Euro)                                            |
| Sliding range:     | 120 mm (4.7")                                                                |
| Mounting base:     | Ø100 mm (3.9") ball levelling                                                |
| Height above bowl: | 162 mm (6.4")                                                                |
| Illumination:      | Bubble level, pan/tilt drag controls                                         |
| Pan handle:        | Telescopic 390 - 590mm (15.4-23.2")                                          |
| Temperature range: | -40° to +65° C (-40° to +149° F)                                             |
| Material:          | Lightweight hi-strength diecast aluminium alloy and rigid composite polymers |
| Finish:            | Durable black ripple (low sheen) with anti-corrosive pre-treatment           |
| Sealing:           | Water and dust resistant                                                     |
| Warranty:          | 3 Years                                                                      |

## OPTIONAL ACCESSORIES

|      |                                          |
|------|------------------------------------------|
| 858  | Offset camera plate with 2 x 3/8" screws |
| 696  | Pan handle - telescopic with clamp       |
| 1260 | Accessory mounting block                 |
| 1225 | Mitchell base adapter with clamp         |

## SPARES

|       |                   |
|-------|-------------------|
| P0036 | 1/4" camera screw |
| P0037 | 3/8" camera screw |

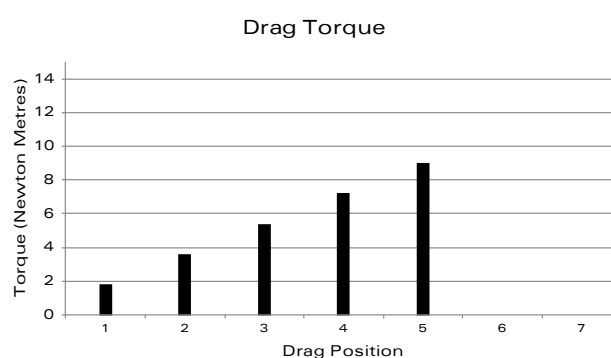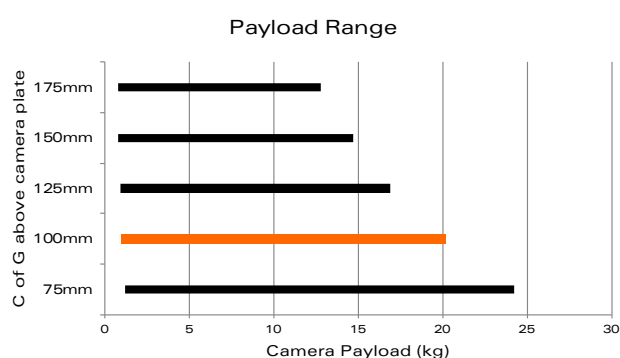

### AUSTRALIA

Miller Camera Support Equipment  
30 Hotham Parade  
Artarmon, Sydney, NSW 2064  
Australia

P +61 2 9439 6377 F +61 2 9438 2819  
sales@miller.com.au

### EUROPE

Miller Fluid Heads (Europe) Ltd.  
Unit 12A, Shepperton Business Park  
Govett Avenue, Shepperton  
Middlesex, TW17 8BA  
United Kingdom

P +44 (0) 1932 222 888 F +44 (0) 1932 222 211  
sales@millertripods-europe.com

### USA

Miller Camera Support LLC  
216 Little Falls Road (Unit 2),  
Cedar Grove, New Jersey 07009  
USA

P +1 (973) 857 8300 F +1 (973) 857 8188  
sales@millertripods.us