



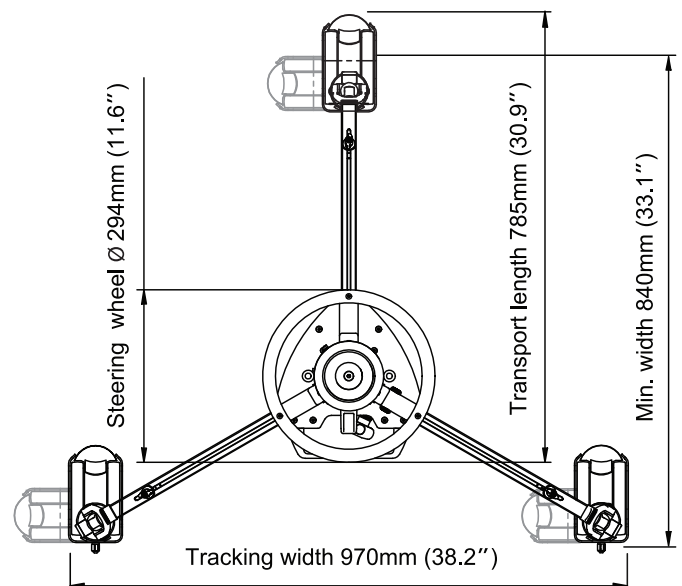

FEATURES

- 7 selectable positions of fluid pan and tilt drag + 0.
- 16 position CB Plus™ counterbalance system.
- Wide payload range 6-25kg (13.2-55.1lbs).
- Wideheight range 972mm (38.2") up to 1537mm (60.5").
- Precise, smooth and low noise In-shot column with 450mm (17.7") stroke.
- Air adjustable column system for quick payload balancing.
- Independent dolly wheel axle brake system eliminates wheel tyre indents.
- Multiple wheel positions for linear or radius dolly tracking.
- 125mm (4.9") dual ball bearing wheels for quick swivel-turn action.
- Centre hub locking column with adjustable spider arm supports.
- Steering wheel diameter 294mm (11.6").
- Dolly tracking width 970mm (38.2").
- Sturdy adjustable cable guards.
- Portable hand pump with pressure gauge.

Compact & Portable Live Shot Pedestal

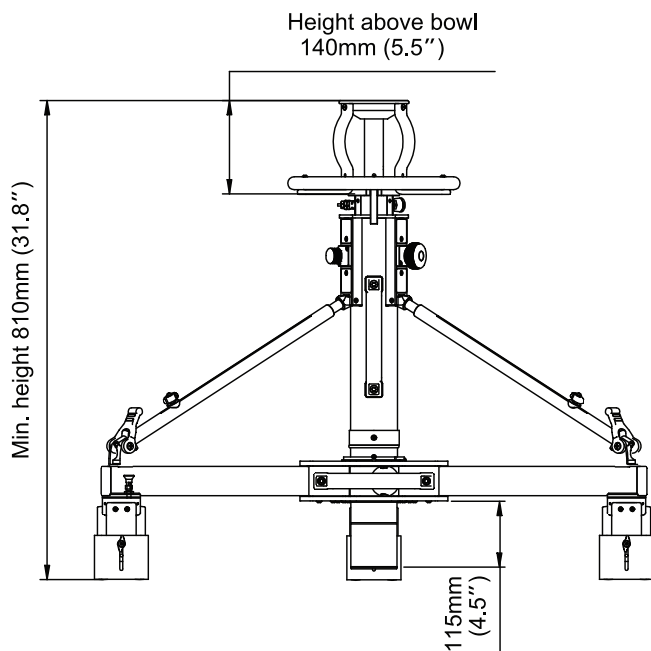

3260 ARROW^x 7 COMBO LIVE 30

Payload Range	6.0-25.0kg (13.2-55.1lbs)
Weight	21.8kg (48.0lbs)
Height Range	972-1537mm (38.2-60.5")
Mounting Base	Ø100mm (3.9") ball levelling
Column In-Shot Stroke	450mm (17.7")
Steering Wheel Diameter	Ø294mm (11.6")
Tracking Width	970mm (38.2")
Wheel Diameter	Ø125mm (4.9")




Components

1076	Arrowx 7 fluid head
696	2 x Pan handle telescopic with clamp
3220	Combo Live 30 pedestal

OPTIONAL ACCESSORIES

*3290 Extension assembly 315mm (12.4")

3294 Weight bag 5.6kg (12.3 lbs)

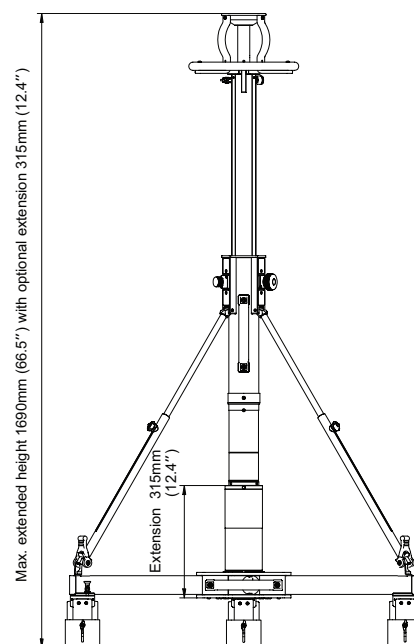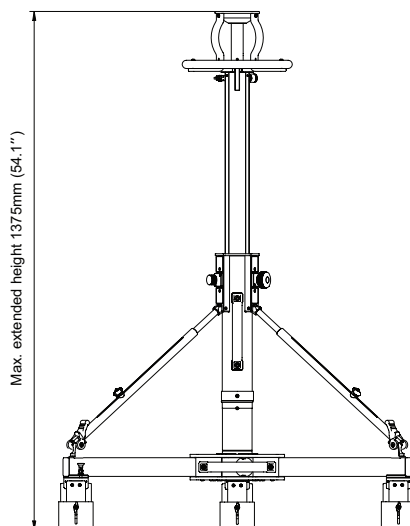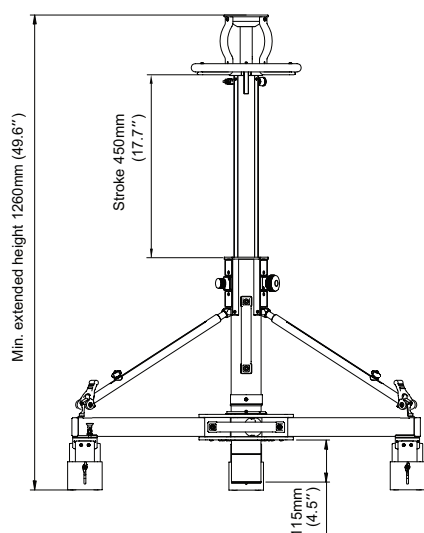

Quality
ISO 9001

SAI GLOBAL
Australia only

AUSTRALIA

Miller Camera Support Equipment
30 Hotham Parade
Artarmon, Sydney, NSW 2064
Australia

P +61 2 9439 6377 F +61 2 9438 2819
sales@miller.com.au

EUROPE

Miller Fluid Heads (Europe) Ltd.
Unit 12A, Shepperton Business Park
Govett Avenue, Shepperton
Middlesex, TW17 8BA
United Kingdom

P +44 (0) 1932 222 888 F +44 (0) 1932 222 211
sales@millertripods-europe.com

USA

Miller Camera Support LLC
216 Little Falls Road (Unit 2),
Cedar Grove, New Jersey 07009
USA

P +1 (973) 857 8300 F +1 (973) 857 8188
sales@millertripods.us