



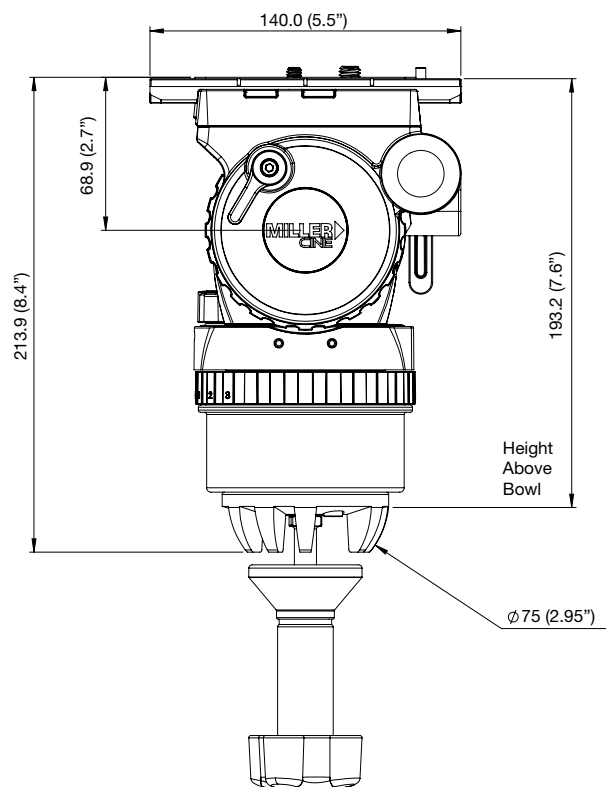

FEATURES

- Compact, light and versatile.
- Customisable flat base head which can be fitted with optional 75mm (Cat#1288), 100mm (Cat#1290) 150mm (Cat#1295) or Mitchell base (Cat#1225).
- Perfect for payloads to 0-10kg (22.0lbs).
- 15+0 CB Plus selectable counterbalance positions.
- Ergonomically located CB Plus switch.
- 3+0 selectable positions of fluid pan and tilt drag.
- Positive selection radial ring controls.
- Illuminated bubble level.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Side loading base plate, with a choice from optional Cat#1276, which comes with the Standard Miller camera plate having 60mm of balance travel or Cat#1278 which comes with Versa camera plate having 105mm of balance travel and is reversible.
- Robust construction for rugged outdoor shooting conditions.
- Side mounting points for viewfinders and accessories.
- Optional selection of pan handles.
- 3 year warranty.

Compact, light and versatile

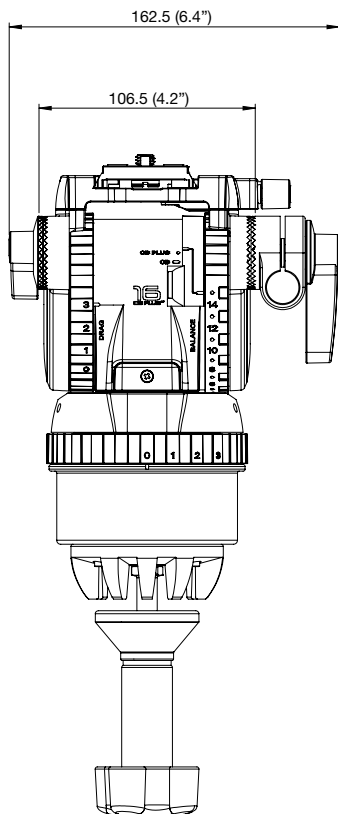

1116 ARTX 5 FLUID HEAD

Weight:	2.2kg (4.8lbs)
Payload range:	0 - 10 kg (0 - 22.0 lbs)
Pan/tilt drag:	3 selectable fluid drag positions + 0
Counterbalance:	16 selectable positions (15+0)
Drag Max. Torque:	3.5 Newton Metres
Pan/tilt lock:	Positive lock caliper brake system
Tilt range:	+ 90° / -75°
Pan range:	360°
Camera platform:	Quick release, side load camera plate
Sliding range:	60mm (2.36") with 1205 Miller plate. 105mm with 1205 Versa plate
Mounting Base:	Flat base with centre 3/8inch thread, 3 x M5 threads and 2 x ¼ inch threads
Height above bowl:	Naked head only height with plate base 165mm (6.5"). Full height above bowl with 1288 75mm clawball 202mm (7.95").
Illumination:	Bubble Level
Pan handle:	Optional: 679 fixed pan handle with clamp 390mm (15.4") or 696 tele- scopic pan handle 390-590mm (15.4- 23.")
Temperature range:	-40° to +65° C (-40° to +149° F)
Warranty:	3 Years


OPTIONAL ACCESSORIES

696	Pan handle - telescopic with clamp
679	Pan handle - std with clamp
1270	Accessory mounting block Arri Block kit
1278	Side load camera platform (ArtX)
1276	Side load camera platform (CX)
1201	Camera Plate 105mm Sliding Range
1207	Camera plate (CX) 120mm Sliding Range
1209	Camera plate (CX) 60mm Sliding Range
1205	Standard camera plate
1222	Arri mounting adaptor
1236	Serr. hand clamp extension (D36 Arri)
1238	Serr. hand clamp extension (Miller)
1248	D15 Sleeve adaptor
1255	Accessory mounting block kit
1288	D75 Claw Ball Level
1290	D100 Claw Ball Level
1295	D150 Claw Ball Level


SPARES

PN14222	1/4" camera screw (long)
PN14223	3/8" camera screw (long)
PN14224	3/8" camera screw to 1/4" pin

Payload Range (ArtX 5)

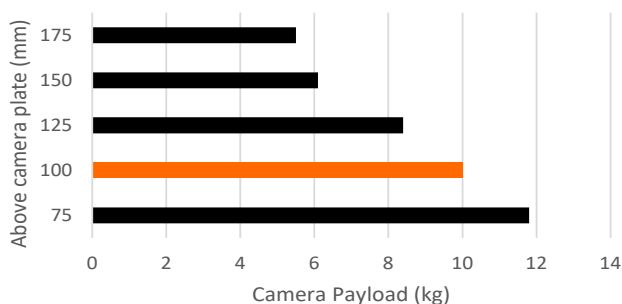

Drag Torque

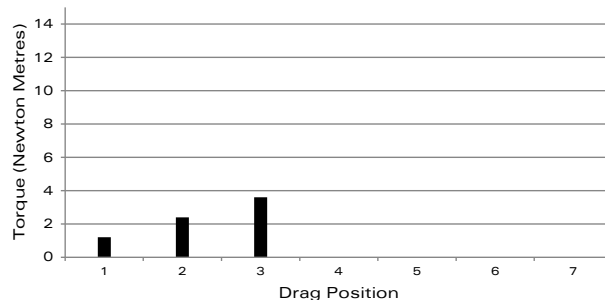

Quality
ISO 9001

SAI GLOBAL
Australia only

AUSTRALIA

Miller Camera Support Equipment
6 Ross Place
Wetherill Park, Sydney, NSW 2164
Australia

P +61 2 9439 6377 F +61 2 9438 2819
sales.au@millertripods.com

EUROPE

Miller Fluid Heads (Europe) Ltd.
Unit 12A, Shepperton Business Park
Govett Avenue, Shepperton
Middlesex, TW17 8BA
United Kingdom

P +44 (0) 1932 222 888 F +44 (0) 1932 222 211
sales.eu@millertripods.com

USA

Miller Camera Support LLC
216 Little Falls Road (Unit 2),
Cedar Grove, New Jersey 07009
USA

P +1 (973) 857 8300 F +1 (973) 857 8188
sales.us@millertripods.com