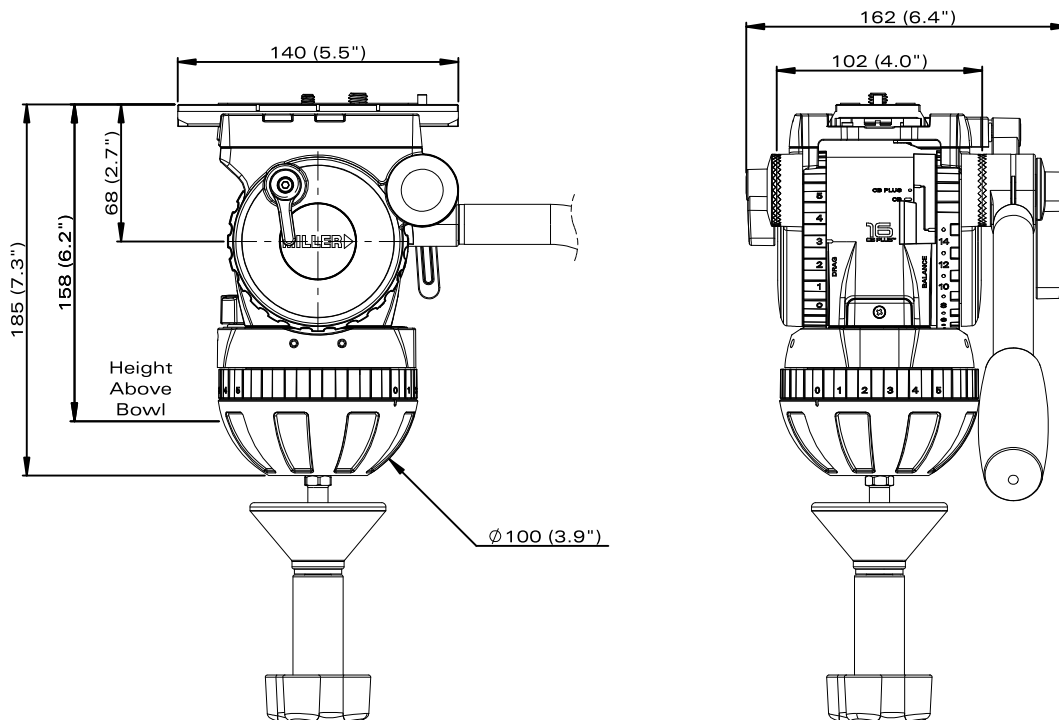




## FEATURES

- Compact, lightweight and versatile.
- 5 selectable drag positions (pan and tilt) + 0.
- Base Plate with 2 positions safety switch. Position 1 compatible with: Miller Versa, Manfrotto 501PL and Kondor Blue 501/ARCA Pivot. Position 2 compatible with: DJI R, RS and SmallRig QR.
- 16 selectable counterbalance positions, with CB Plus for precise counterbalance.
- Perfect for payloads to 0 - 14.0 kg (0 - 30.9 lbs).
- Fluid drag system with smooth start and soft stop technology & balanced diagonal transition.
- Slim inline radial ring controls.
- Illuminated bubble level.
- Removable ball level stud for flat base mounting (sliders) with 3/8" screw hole.
- Precise floating pan-tilt caliper locks ensure bounce free on-off performance.
- Side loading camera plate with 100mm travel.
- Robust construction for rugged outdoor shooting conditions.
- Optional second pan handle mount.
- 2 side mounts for accessory blocks.
- 3 year warranty.

Compact, lightweight and versatile in 100mm



**1147 CXV 14 FLUID HEAD**

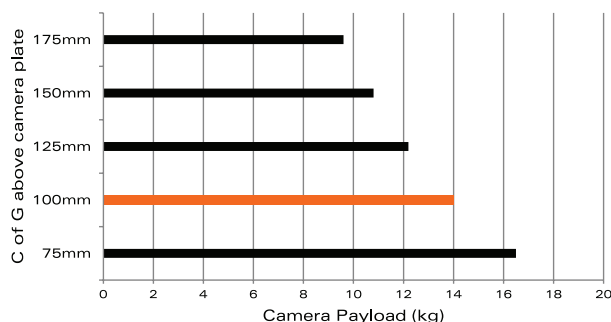
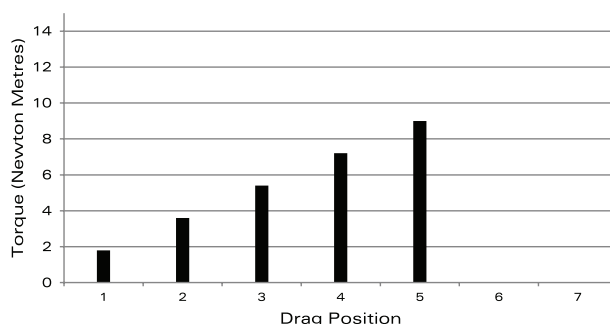
|                    |                                                                                                                                                                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight             | 2.5kg (5.5bs)                                                                                                                                                                                                                                                             |
| Payload range:     | 0 - 14.0 kg (0 - 30.9bs)                                                                                                                                                                                                                                                  |
| Pan/tilt drag:     | 5 selectable fluid drag positions +0                                                                                                                                                                                                                                      |
| Counterbalance:    | 16 selectable positions (15 + 0)                                                                                                                                                                                                                                          |
| Pan/tilt lock:     | Positive lock caliper brake system                                                                                                                                                                                                                                        |
| Tilt range:        | + 90° /-75,                                                                                                                                                                                                                                                               |
| Pan range:         | 360°                                                                                                                                                                                                                                                                      |
| Camera Platform:   | Versa, quick release, side load cameraplate. Base Plate with 2 positions safety switch. Position 1(one dot) for compatibility with: Miller Versa, Manfrotto 501PL and Kondor Blue 501/ARCA Pivot. Position 2(two dots) for compatibility with: DJI R, RS and SmallRig QR. |
| Sliding range:     | 100mm (3.9")                                                                                                                                                                                                                                                              |
| Mounting base:     | Ø100mm (3.9") ball levelling                                                                                                                                                                                                                                              |
| Height above bowl: | 158mm (6.2")                                                                                                                                                                                                                                                              |
| Illumination:      | Bubble level                                                                                                                                                                                                                                                              |
| Pan handle:        | Fixed 390mm (15.4")                                                                                                                                                                                                                                                       |
| Temperature range: | -40° to +65° C (-40° to +149° F)                                                                                                                                                                                                                                          |
| Material:          | Lightweight hi-strength diecast aluminium alloy and rigid composite polymers                                                                                                                                                                                              |
| Finish:            | Durable black ripple (low sheen) with anti corrosive pre-treatment                                                                                                                                                                                                        |
| Sealing:           | Water and dust resistant                                                                                                                                                                                                                                                  |
| Warranty:          | 3 years                                                                                                                                                                                                                                                                   |

**OPTIONAL ACCESSORIES**

|                                    |      |
|------------------------------------|------|
| Pan handle - fixed with clamp      | 679  |
| Pan handle - telescopic with clamp | 696  |
| Versa camera plate                 | 1201 |
| Accessory mounting block           | 1255 |

**SPARES**

|                          |         |
|--------------------------|---------|
| Battery                  | P3798   |
| Camera screw 1/4" (Long) | PN14222 |
| Camera screw 3/8" (Long) | PN14223 |
| 3/8" screw to 1/4" pin   | PN14224 |
| Serrated washer          | PN12501 |

**Payload Range****Drag Torque****AUSTRALIA**

Miller Camera Support Equipment  
6 Ross Place  
Wetherill Park, Sydney, NSW 2164  
Australia

P +61 2 9439 6377 F +61 2 9438 2819  
sales.au@millertripods.com

**EUROPE**

Miller Fluid Heads (Europe) Ltd.  
Unit 12A, Shepperton Business Park  
Govett Avenue, Shepperton  
Middlesex, TW17 8BA  
United Kingdom

P +44 (0) 1932 222 888 F +44 (0) 1932 222 211  
sales.eu@millertripods.com

**USA**

Miller Camera Support LLC  
216 Little Falls Road (Unit 2),  
Cedar Grove, New Jersey 07009  
USA

P +1 (973) 857 8300 F +1 (973) 857 8188  
sales.us@millertripods.com