

MILLER 
THE RIGHT FEEL

Courtesy of:
Jason Henwood
Miller Sharpshooter



product catalogue

millertripods.com

70 years of innovation 1954 - 2024

Some camera innovations are so fundamental that it is impossible to imagine the world of television camera work without them. The fluid action head, first patented by the Australian company Miller, is a perfect example of one such invention.

Before Eric Miller introduced the world's first fluid action head in 1946, camera operators had no option but to work with bulky and expensive gear-driven assemblies; panning shots were tricky and diagonal moves virtually impossible. The Miller fluid action head revolutionised the film and television industry by giving operators the freedom to shoot far more creatively, reduced production time and cost, creating shots previously unobtainable.

Miller continues to grow and develop innovating products, of very high quality, that users need.

Miller Milestones

- 1946 The world's first fluid head patented – patent #130,757
- 1954 Miller commence commercial operations in Clement St Factory, Rushcutters Bay
- 1958 Miller export the first tripod to Hollywood
- 1965 Light professional fluid head released, revolutionising setting new standards for film making
- 1980 Miller 30/50 fluid heads with counterbalance systems released
- 1992 DS 75mm fluid heads launched globally
- 1997 Arrow fluid head series released
- 2000 Sprinter tripod series released – fast dual co-leg lock action
- 2003 Solo tripod series launched for traveling video journalists
- 2004 Sprinter II tripod series released – improved designed leg lock levers
- 2012 Skyline 70 fluid head released with Ø150mm claw ball
- 2013 Air fluid head released for DSLR users
- 2014 Cineline 70 fluid head with side load camera plate Arri type released
- 2015 ArrowX fluid head series released with CB PLUS 16 positions of counterbalance
- 2017 CompassX fluid head series with CB PLUS 16 positions of counterbalance and Skyline 90 fluid head released for 75 kg camera payload
- 2018 ArrowFX fluid head with encoder released
- 2019 CinX 3, 5 & 7 fluid head series and Sprinter II Ø75 tripod released
- 2020 ArrowX1 fluid head released
- 2021 Solo Q tripod series released with newly patented designed quick action leg operation
- 2023 AirV, CompassXV, CinX20, 23, and 25 with Versa camera plate, Cinx8 and 9, SkyX 8 fluid heads with CB PLUS 16 positions of counterbalance released
- 2024 Solo-Q Pod with monopod base stand and SkyFX9 fluid head with encoder released
- 2025 Watch this space



The Reibel family has faithfully upheld the Miller tradition, passing it from father to son since the 1970s. In the accompanying photo, Robert Reibel proudly wields a vintage 1970s Miller Woody with a LPTS1054 fluid head, while his son Adam Reibel stands beside him, equipped with a state-of-the-art CX6 mounted on a Solo Q tripod, the latest generation model. Despite their differing equipment, both father and son stand side by side, united in their passion for the craft. Remarkably, the Woody from the 70s remains in impeccable working condition, a testament to its enduring quality and the dedication of the Reibel family to their craft.

broadcast

A professional video camera is mounted on a black Miller Sharpshooter tripod, positioned on a rocky, uneven ground. The camera is facing a large, rugged volcano in the background, which is emitting a thick, dark plume of smoke or ash into the sky. The scene is captured during the day, with natural light illuminating the landscape. The tripod has 'MILLER SHARPSHOOTER' written on its leg. The camera has a microphone attached to the top and a flip-out screen.

pages 4 to 16

Courtesy of:
Bradley Ambrose
Miller Sharpshooter



THE LIGHTWEIGHT, BROADCAST QUALITY, TRAVEL COMPANION FOR PROFESSIONALS

- Compact, lightweight, dependable.
- Lightweight 1.4kg (3.0lbs).
- 2 selectable positions of counterbalance.
- Perfect for camera payloads to 2-5kg (4.4-11lbs).
- Unique, reliable fluid drag technology delivering smooth starts, soft stops pans-tilt actions.
- Consistent fluid drag performance in extreme environments.
- Precision ball bearing mounted pan-tilt movement.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Quick release, 60mm balance travel camera plate.
- Robust construction for rugged outdoor shooting conditions, built for endurance.
- Removable ball level stud for flat base mounting (Sliders) with 3/8" screw hole.
- Accessory mount option for viewfinders.
- Optional second pan handle.
- System comes with tripod bag
- 3 year warranty.

SYSTEMS & COMPONENTS

3001	AiR (1042) Solo 75 2-St Alloy Tripod (1630) Pan Handle (682) Softcase (3516) Camera Plate (1204)
3005	AiR (1042) Solo-Q 75 2-St CF Tripod (2500) Pan Handle (682) Softcase (3516) Camera Plate (1204) Strap (1520)
3010	AiR (1042) Solo-Q 75 3-St CF Tripod (2505) Pan Handle (682) Softcase (3516) Camera Plate (1204)
3015	AiR (1042) Toggle LW Tripod (440) AG Spreader (835) Pan Handle (682) Strap (554) Softcase (3512) Feet (550) Camera Plate (1204)



Cat#: 3005

* Sold separately




THE LIGHTWEIGHT, FLEXIBLE, VERSATILE BROADCAST QUALITY, TRAVEL COMPANION FOR PROFESSIONALS

- Compact, lightweight, dependable
- Side loading, quick release Versa camera plate with 100mm travel compatible with Manfrotto 501pl camera plate
- Consistent fluid drag performance in extreme environments.
- 2 selectable positions of counterbalance.
- Perfect for camera payloads to 2-5kg (4.4-11lbs).
- Integrated 75mm claw ball.
- System comes with tripod bag.
- Precision ball-bearing pan and tilt movement
- Precise floating caliper pan and tilt locks eliminates bounce when locking and releasing.
- Removable ball level studs enabling flat base mounting when required for sliders etc.
- Accessory mounting point via optional adapter.
- 3 year warranty.

SYSTEMS & COMPONENTS

3003	AiRV (1044) Solo 75 2-St Alloy Tripod (1630) Pan Handle (682) Softcase (3516)
3007	AiRV (1044) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (682) Strap (1520) Softcase (3516)
3012	AiRV (1044) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle (682) Softcase (3516)
3017	AiRV (1044) Toggle LW Tripod (440) AG Spreader (835) Pan Handle (682) Strap (1520) Feet (550) Softcase (3512)
3019	AiRV (1044) Solo-Q Pod w Swivel Foot & Carry Strap (314) Pan Handle (682) Clamp Nut (P7850) Camera Plate (1201) Monopod Base Stand (315) Softcase (3516)



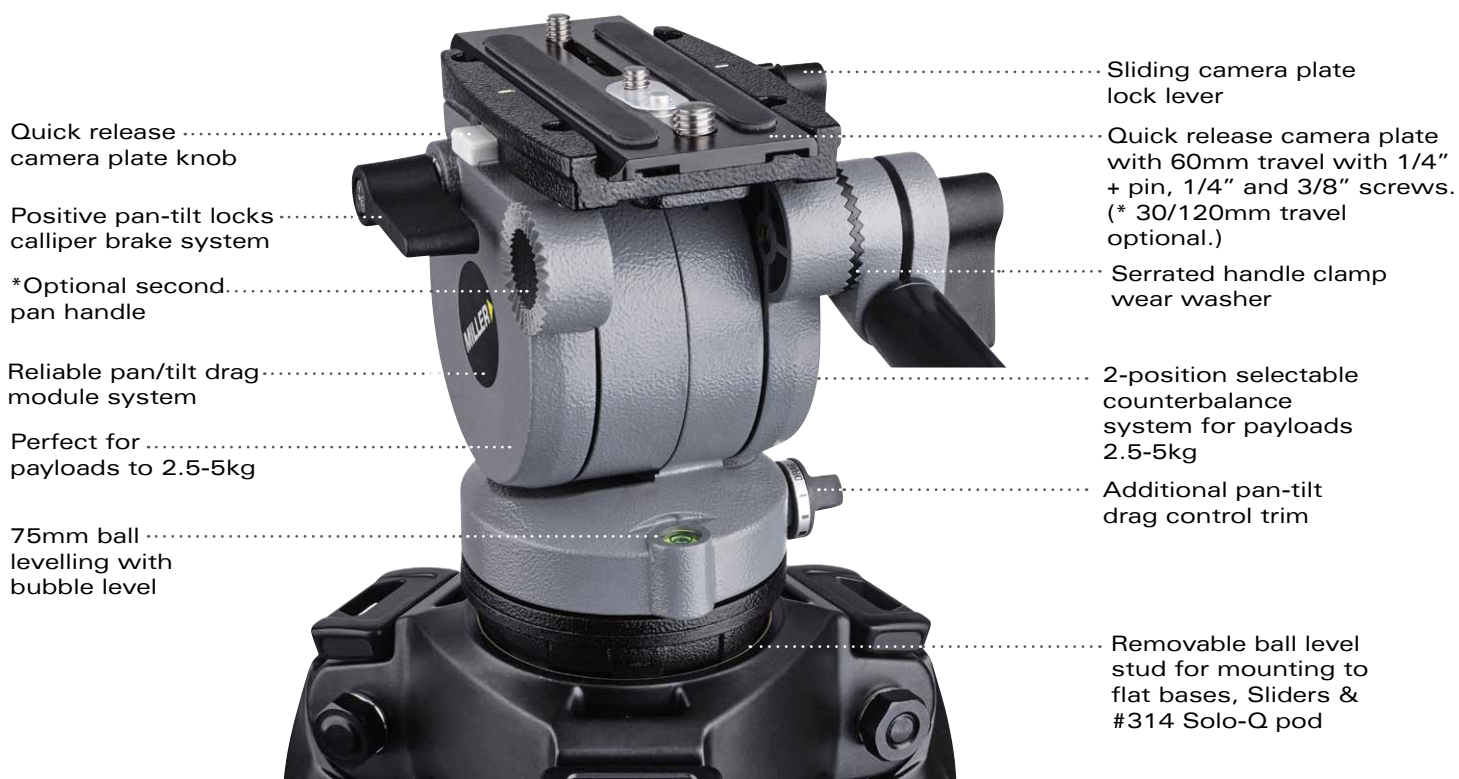

THE LIGHTWEIGHT PROFESSIONAL CHOICE

- Compact, lightweight, dependable.
- Lightweight 1.5kg (3.3lbs).
- 2 selectable positions of counterbalance.
- Perfect for camera payloads to 2.5-5kg (5.5-11lbs).
- Unique, reliable fluid drag technology delivering smooth starts, soft stops pans-tilt actions.
- Consistent fluid drag performance in extreme environments.
- Precision ball bearing mounted pan-tilt movement.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Quick release, 60mm balance travel camera plate with 1/4" screw + pin, 1/4" and 3/8" screws.
- Robust construction for rugged outdoor shooting conditions, built for endurance.
- Removable ball level stud for flat base mounting (Sliders) with 3/8" screw hole.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

828 DS10 (182) Toggle LW Tripod (440) AG Spreader (835) Pan Handle (681) Strap (554) Softcase (3512) Feet (550)

1640 DS10 (182) Solo 75 2-St Alloy Tripod (1630) Pan Handle (681) Softcase (3516)

1511 DS10 (182) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (681) Strap (1520) Softcase (3516)





MULTIFUNCTIONAL LIGHTWEIGHT FLEXIBILITY

- Compact, lightweight and a hi-performer.
- Lightweight 1.5kg (3.3lbs).
- 2 selectable positions of counterbalance.
- Perfect for camera payloads to 5-10kg (11-22lbs).
- Unique, reliable fluid drag technology delivering smooth starts, soft stops pans-tilt actions.
- Consistent fluid drag performance in extreme environments.
- Precision ball bearing mounted pan-tilt movement.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Quick release, 60mm balance travel camera plate with 1/4" screw + pin, 1/4" and 3/8" screws
- Robust construction for rugged outdoor shooting conditions, built for endurance.
- Removable ball level stud for flat base mounting (Sliders) with 3/8" screw hole.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

848	DS20 (184) Toggle 2-St Tripod (420G) Ground Spreader (411) Pan Handle (681) Strap (554) Softcase (3514)
850	DS20 (184) Toggle 2-St Tripod (420) AG Spreader (508) Pan Handle (681) Strap (554) Softcase (3514) Feet (550)
1643	DS20 (184) Solo 75 2-St Alloy Tripod (1630) Pan Handle (681) Softcase (3516)
1514	DS20 (184) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (681) Strap (1520) Softcase (3516)



Cat#: 1514

* Sold separately

Spare screw storage

Positive pan-tilt locks calliper brake system

(CX2 & CX6) 3 positions of fluid tilt drag plus zero
(CX8) 5 positions of fluid tilt drag plus zero

Accessory mounting adaptor points on both sides

Sliding camera plate lock lever.

Quick release, side load camera plate sliding range 60mm (2.4").
(* 30/120mm travel optional.)

16 CB PLUS selectable positions of counterbalance (15+0)

Illuminated bubble level

(CX2 & CX6) 3 positions of fluid pan drag plus zero
(CX8) 5 positions of fluid pan drag plus zero

COMPACT, UNCOMPROMISED PERFORMANCE

- Compact, light and versatile.
- Weight 2.3kg (5.1lbs) (CX2 & CX6).
- Weight 2.5kg (5.5lbs) (CX8).
- 75mm ball levelling.
- CX2 payload 0-8kg (17.6lbs).
- CX6 payload 0-12kg (26.4lbs).
- CX8 payload 0-12kg (26.4lbs).
- 15+0 CB Plus selectable counterbalance positions.
- Ergonomically located CB Plus switch.
- 3+0 (CX2 & CX6) 5+0 (CX8) selectable positions of fluid pan and tilt drag.
- Positive selection radial ring controls.
- Illuminated bubble level.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Side loading, 60mm balance travel camera plate with 1/4" and 3/8" screws.
- Robust construction for rugged outdoor shooting conditions.
- Side mounting point for viewfinders and accessories.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

3702	CX2 (1090) Toggle LW Tripod (440) AG Spreader (835) Pan Handle Strap (554) Softcase (3512) Feet (550)
3704	CX2 (1090) Toggle 2-St Tripod (420G) Ground Spreader (411) Pan Handle Strap (554) Softcase (3514)
3705	CX2 (1090) Toggle 2-St Tripod (420) AG Spreader (508) Pan Handle Strap (554) Softcase (3514) Feet (550)
3710	CX2 (1090) Solo 75 2-St Alloy tripod (1630) Pan Handle Strap (1520) Softcase (3514)
3712	CX2 (1090) Solo-Q 75 2-St Carbon Fibre tripod (2500) Pan Handle Strap (1520) Softcase (3514)
3714	CX2 (1090) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle Strap (1520) Softcase (3514)
3715	CX2 (1090) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)
3716	CX2 (1090) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
3720	CX6 (1092) Toggle 2-St Tripod (420G) Ground Spreader (411) Pan Handle Strap (554) Softcase (3514)
3721	CX6 (1092) Toggle 2-St Tripod (420) AG Spreader (508) Pan Handle Strap (554) Softcase (3514) Feet (550)
3726	CX6 (1092) Solo 75 2-St Alloy Tripod (1630) Pan Handle Strap (1520) Softcase (3514)
3728	CX6 (1092) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle Strap (1520) Softcase (3514)
3730	CX6 (1092) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle Strap (1520) Softcase (3514)
3731	CX6 (1092) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)
3732	CX6 (1092) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
3736	CX8 (1093) Toggle 2-St Tripod (420G) Ground Spreader (411) Pan Handle Strap (554) Softcase (3514)
3737	CX8 (1093) Toggle 2-St Tripod (420) AG Spreader (508) Pan Handle Strap (554) Softcase (3514) Feet (550)
3742	CX8 (1093) Solo 75 2-St Alloy Tripod (1630) Pan Handle Strap (1520) Softcase (3514)
3744	CX8 (1093) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle Strap (1520) Softcase (3514)
3746	CX8 (1093) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle Strap (1520) Softcase (3514)
3747	CX8 (1093) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)
3748	CX8 (1093) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)



Cat#: 3714



PRECISE CONTROL FOR HEAVIER PAYLOADS

- Affordable, Stable, Robust.
- Weight 2.5kg (5.5lbs) (CX10 & CX14).
- CX10 Perfect for payloads to 0-12kg (26.4lbs).
- CX14 Perfect for payloads to 0-14.0 kg (0-30.9 lbs).
- 15+0 CB Plus selectable counterbalance positions.
- Ergonomically located CB Plus switch.
- 5+0 selectable positions of fluid pan and tilt drag.
- Positive selection radial ring controls.
- Illuminated bubble level.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Side loading, 60mm balance travel camera plate with 1/4" and 3/8" screws.
- Robust construction for rugged outdoor shooting conditions.
- Side mounting point for viewfinders and accessories.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

3752	CX10 (1096) Sprinter II 2-St Tripod Alloy Tripod (1589) Mid Level Spreader (993) Pan Handle Feet (475) Softcase (3500)
3753	CX10 (1096) Toggle 2-St Tripod Alloy Tripod (402G) Ground Spreader (411) Pan Handle Strap (554) Softcase (3514)
3756	CX10 (1096) Toggle 2-St Tripod Alloy Tripod (402) AG Spreader (508) Pan Handle Feet (550) Strap (554) Softcase (3514)
3767	CX10 (1096) Solo-Q 100 2-St CF Tripod (2515) Pan Handle Strap (1520) Softcase (3514)
3768	CX10 (1096) Solo-Q 100 3-St CF Tripod (2520) Pan Handle Strap (1520) Softcase (3514)
3749	CX10 (1096) Sprinter II 2-St Tripod Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
3750	CX10 (1096) Sprinter II 2-St Tripod Alloy Tripod (1580) Mid Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
3751	CX10 (1096) Sprinter II 2-St Tripod Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (679) Softcase (3500)
3769	CX14 (1097) Toggle 2-St Alloy Tripod (402G) Ground Spreader (411) Pan Handle (679) Strap (554) Softcase (3514)
3770	CX14 (1097) Toggle 2-St Alloy Tripod (402) AG Spreader (508) Pan Handle (679) Strap (554) Feet (550) Softcase (3514)
3771	CX14 (1097) Sprinter II 2-St Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
3772	CX14 (1097) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
3773	CX14 (1097) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (679) Softcase (3500)
3782	CX14 (1097) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3500)
3783	CX14 (1097) Sprinter II 2-St Carbon Fibre Tripod (1576) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
3784	CX14 (1097) Solo-Q 100 3-St Carbon Fibre Tripod (2520) Pan Handle (679) Strap (1520) Softcase (3502)
3786	CX14 (1097) Solo-Q 100 2-St Carbon Fibre Tripod (2515) Pan Handle (679) Strap (1520) Softcase (3502)



* Sold separately



COMPACT, UNCOMPROMISED VERSATILE PERFORMANCE

- Compact, light and versatile.
- Weight 2.3kg (5.1lbs) (CXV2 & CXV6).
- Weight 2.5kg (5.5lbs) (CXV8).
- 75mm ball levelling.
- CXV2 payload 0-8kg (17.6lbs).
- CXV6 payload 0-12kg (26.4lbs).
- CXV8 payload 0-12kg (26.4lbs).
- 15+0 CB Plus selectable counterbalance positions.
- Ergonomically located CB Plus switch.
- (CXV2 & CXV6) 3 selectable positions & (CXV8) 5 selectable positions of fluid pan and tilt drag plus zero
- Positive selection radial ring controls.
- Illuminated bubble level.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Side loading, 100mm balance travel camera plate with 1/4" and 3/8" screws.
- Robust construction for rugged outdoor shooting conditions.
- Side mounting point for viewfinders and accessories.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

4025	CXV2 (1135) Solo 75 2-St Alloy Tripod (1630) Pan Handle (679) Strap (1520) Softcase (3514)
4027	CXV2 (1135) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (679) Strap (1520) Softcase (3514)
4030	CXV2 (1135) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle (679) Strap (1520) Softcase (3514)
4034	CXV2 (1135) Toggle LW Alloy Tripod (440) AG Spreader (835) Pan Handle (679) Strap (1520) Feet (550) Softcase (3512)
4037	CXV2 (1135) Toggle 2-St Alloy Tripod (420G) Ground Spreader (411) Pan Handle (679) Strap (1520) Softcase (3514)
4038	CXV2 (1135) Toggle 2-St Alloy Tripod (420) AG Spreader (508) Pan Handle (679) Strap (1520) Feet (550) Softcase (3514)
4049	CXV2 (1135) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
4050	CXV2 (1135) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)
4055	CXV6 (1138) Solo 75 2-St Alloy Tripod (1630) Pan Handle (679) Strap (1520) Softcase (3514)
4057	CXV6 (1138) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (679) Strap (1520) Softcase (3514)
4060	CXV6 (1138) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle (679) Strap (1520) Softcase (3514)
4067	CXV6 (1138) Toggle 2-St Alloy Tripod (420G) Ground Spreader (411) Pan Handle (679) Strap (1520) Softcase (3514)
4068	CXV6 (1138) Toggle 2-St Alloy Tripod (420) AG Spreader (508) Pan Handle (679) Strap (1520) Feet (550) Softcase (3514)
4079	CXV6 (1138) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
4080	CXV6 (1138) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)
4085	CXV8 (1141) Solo 75 2-St Alloy Tripod (1630) Pan Handle (679) Strap (1520) Softcase (3514)
4087	CXV8 (1141) Solo-Q 75 2-St Carbon Fibre Tripod (2500) Pan Handle (679) Strap (1520) Softcase (3514)
4090	CXV8 (1141) Solo-Q 75 3-St Carbon Fibre Tripod (2505) Pan Handle (679) Strap (1520) Softcase (3514)
4097	CXV8 (1141) Toggle 2-St Alloy Tripod (420G) Ground Spreader (411) Pan Handle (679) Strap (1520) Softcase (3514)
4098	CXV8 (1141) Toggle 2-St Alloy Tripod (420) AG Spreader (508) Pan Handle (679) Strap (1520) Feet (550) Softcase (3514)
4109	CXV8 (1141) 75 Sprinter II 2-St Carbon Fibre Tripod (1620G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
4110	CXV8 (1141) 75 Sprinter II 2-St Carbon Fibre Tripod (1620) Mid-Level Spreader (593) Pan Handle (679) Feet (475) Softcase (3502)



PRECISE CONTROL FOR HEAVIER PAYLOADS

- Affordable, Stable, Robust.
- Weight 2.5kg (5.5lbs) (CXV10 & CXV14).
- CXV10 Perfect for payloads to 0-12kg (26.4bs).
- CXV14 Perfect for payloads to 0-14.0 kg (0-30.9 lbs).
- 15+0 CB Plus selectable counterbalance positions.
- Ergonomically located CB Plus switch.
- 5 selectable positions of fluid pan and tilt drag plus zero
- Positive selection radial ring controls.
- Illuminated bubble level.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Side loading, 100mm balance travel camera plate with 1/4" and 3/8" screws.
- Robust construction for rugged outdoor shooting conditions.
- Side mounting point for viewfinders and accessories.
- Optional second pan handle.
- 3 year warranty.

SYSTEMS & COMPONENTS

4117	CXV10 (1144) Solo-Q 100 2-St Carbon Fibre Tripod (2515) Pan Handle (679) Strap (1520) Softcase (3514)
4120	CXV10 (1144) Solo-Q 100 3-St Carbon Fibre Tripod (2520) Pan Handle (679) Strap (1520) Softcase (3514)
4127	CXV10 (1144) Toggle 2-St Alloy Tripod (402G) Ground Spreader (411) Pan Handle (679) Strap (1520) Softcase (3514)
4128	CXV10 (1144) Toggle 2-St Alloy Tripod (402) AG Spreader (508) Pan Handle (679) Strap (1520) Feet (550) Softcase (3514)
4131	CXV10 (1144) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (679) Softcase (3500)
4132	CXV10 (1144) Sprinter II 1-St Alloy Tripod (1589) Mid Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3500)
4135	CXV10 (1144) Sprinter II 2-St Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
4136	CXV10 (1144) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
4140	CXV10 (1144) Sprinter II 2-St Carbon Fibre Tripod (1576) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
4147	CXV14 (1147) Solo-Q 100 2-St Carbon Fibre Tripod (2515) Pan Handle (679) Strap (1520) Softcase (3502)
4150	CXV14 (1147) Solo-Q 100 3-St Carbon Fibre Tripod (2520) Pan Handle (679) Strap (1520) Softcase (3502)
4157	CXV14 (1147) Toggle 2-St Alloy Tripod (402G) Ground Spreader (411) Pan Handle (679) Strap (1520) Softcase (3514)
4158	CXV14 (1147) Toggle 2-St Alloy Tripod (402) AG Spreader (508) Pan Handle (679) Strap (1520) Feet (550) Softcase (3514)
4161	CXV14 (1147) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (679) Softcase (3500)
4162	CXV14 (1147) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3500)
4165	CXV14 (1147) Sprinter II 2-St Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (679) Softcase (3502)
4166	CXV14 (1147) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)
4170	CXV14 (1147) Sprinter II 2-St Carbon Fibre Tripod (1576) Mid-Level Spreader (993) Pan Handle (679) Feet (475) Softcase (3502)

* Sold separately



THE HEAVY DUTY PERFORMER

- Compact, lightweight and versatile.
- Weight 2.9kg (6.4lbs) (AX1) 3.1kg (6.8lbs) (AX3).
- Weight 3.4kg (7.4lbs) (AX5 & AX7).
- 16 position CB Plus™ counterbalance system.
- (AX 1 & 3) 3 positions of fluid tilt drag plus zero, 3 positions of fluid pan drag plus zero.
- (AX 5 & 7) 5 positions of fluid tilt drag plus zero, 5 positions of fluid pan drag plus zero
- Arrow^x 1 payload range 0-16.0kg (0-35.3lbs).
- Arrow^x 3 payload range 1-19 kg (2.2-41.8lbs).
- Arrow^x 5 payload range 2-21kg (4.4-46.2lbs).
- Arrow^x 7 payload range 6-25kg (13.2-55.1lbs).
- Illuminated bubble level and pan-tilt drag controls.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Quick release, 120mm sliding camera platform with camera plate (euro).
- Removable ball level stud allows for flat base mounting with 3/8" screw thread.
- 1225 Mitchell base adaptable.
- Side mounting points for viewfinders and accessories.
- 3 year warranty.

SYSTEMS & COMPONENTS

3020	Arrow ^x 1 (1070) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (696) Softcase (3500)
3021	Arrow ^x 1 (1070) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (696) Feet (475) Softcase (3500)
3023	Arrow ^x 1 (1070) Sprinter II 2-St Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (696) Softcase (3502)
3024	Arrow ^x 1 (1070) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (696) Feet (475) Softcase (3502)
3027	Arrow ^x 1 (1070) Sprinter II 2-St CF Tripod (1576) Mid-Level Spreader (993) Pan Handle (696) Feet (475) Softcase (3502)
3030	Arrow ^x 1 (1070) Solo-Q 100 2-St Carbon Fibre Tripod (2515) Pan Handle (696) Strap (1520) Softcase (3502)
3032	Arrow ^x 1 (1070) Solo-Q 100 3-St Carbon Fibre Tripod (2520) Pan Handle (696) Strap (1520) Softcase (3502)
3034	Arrow ^x 3 (1072) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (696) Softcase (3500)
3035	Arrow ^x 3 (1072) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (696) Softcase (3500) Feet (475)
3038	Arrow ^x 3 (1072) Sprinter II 2-St Alloy Tripod (1580G) Ground Spreader (470) Pan Handle (696) Softcase (3502)
3039	Arrow ^x 3 (1072) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (696) Softcase (3502) Feet (475)



SYSTEMS & COMPONENTS

3043	Arrow ^x 3 (1072) Sprinter II 2-St CF Tripod (1576) Mid-Level Spreader (993) Pan Handle (696) Softcase (3502) Feet (475)
3068	Arrow ^x 3 (1072) Solo-Q 100 3-St CF Tripod (2520) Pan Handle (696) Strap (1520) Softcase (3502)
3092	Arrow ^x 5 (1074) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (696) Softcase (3500)
3093	Arrow ^x 5 (1074) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (696) Softcase (3500) Feet (475)
3097	Arrow ^x 5 (1074) Sprinter II 2-St Alloy Tripod (1580) Mid-Level Spreader (993) Pan Handle (696) Softcase (3502) Feet (475)
3101	Arrow ^x 5 (1074) Sprinter II 2-St CF Tripod (1576) Mid-Level Spreader (993) Pan Handle (696) Shellcase (3534) Feet (475)
3128	Arrow ^x 5 (1074) Solo-Q 100 3-St CF Tripod (2520) Pan Handle (696) Strap (1520) Softcase (3502)
3155	Arrow ^x 7 (1076) Sprinter II 1-St Alloy Tripod (1589G) Ground Spreader (470) Pan Handle (696) Softcase (3500)
3156	Arrow ^x 7 (1076) Sprinter II 1-St Alloy Tripod (1589) Mid-Level Spreader (993) Pan Handle (696) Softcase (3500) Feet (475)
3164	Arrow ^x 7 (1076) Sprinter II 2-St CF Tripod (1576) Mid-Level Spreader (993) Pan Handle (696) Shellcase (3534) Feet (475)
3175	Arrow ^x 7 (1076) HD 1-St Alloy Tripod (931) Mid-Level Spreader (993) Pan Handle (696) Feet (475)
3179	Arrow ^x 7 (1076) HD 2-St CF Tripod (925) Mid-Level Spreader (993) Pan Handle (696) Shellcase (3534) Feet (475)





A MASTER FOR SPECIAL EFFECTS

- Pan Resolution: 1.6 million counts per rev.
- Tilt Resolution: 1.0 million counts per rev.
- Removeable encoder housing.
- Weight 4.8kg (10.5lbs) (AFX3).
- Weight 5.1kg (11.2lbs) (AFX5 & AFX7).
- Wide payload range 1-25kg (2.2 - 55.1lbs).
- 5+0 (AFX3) 7+0 (AFX5 & AFX7) selectable positions of fluid pan and tilt drag.
- 16 position CB Plus™ counterbalance system.
- Modular flat base allows for Ø100, Ø150 claw ball level & Mitchell Base.
- Quick release, 120mm sliding camera platform with standard camera plate (euro).
- Modular base allows for Ø100 bowl (incl.), Ø150 claw ball(opt.) or Mitchell base (opt.) (pictured).
- Optional second pan handle mount.
- Side mounting points for viewfinders and accessories.
- 3 year warranty.





FOR STUDIOS AND OB's

- 7 selectable of fluid pan-tilt drag positions + 0.
- 16 selectable positions of counterbalance.
- Perfect for payloads to 4.5-40kg (9.9-88lbs).
- Fluid drag system with smooth start and soft stop technology and balanced diagonal transition.
- Controls "all in one location" design for fast easy and practical use.
- Unique all illuminated bubble level, pan-tilt drag and counterbalance controls.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- High precision ball bearing supported pan-tilt movement.
- Quick release 120mm sliding camera platform camera plate large euro .
- Front mount adaptor for camera assistant's accessory box.
- Mitchell base adaptable.
- Robust construction for rugged outdoor shooting conditions.
- Dual telescopic pan handles.
- Two side mounting points for viewfinders and accessories.
- 3 year warranty.

SYSTEMS & COMPONENTS

2062	SkyX 8 Fluid Head (1052) HD 2-St Carbon Fibre Tripod (937) Mid-Level Spreader (993) 2 x HD Pan Handle (698) Feet (475)
2072	SkyX 8 Fluid Head (1052) HD 1-St Alloy Tripod (943) Mid-Level Spreader (993) 2 x HD Pan Handle (698) Feet (475)
2077	SkyX 8 Fluid Head (1052) HD 1-St Alloy Tripod (944) Mid-Level Spreader (993) 2 x HD Pan Handle (698) Dolly (483) Feet (475)
3272	SkyX 8 Fluid Head (1052) 2 x HD Pan Handles (698) Camera Plate Lrg Euro (1060) MB adaptor with clamp (1225) Combo Live 55 Pedestal (3230)





FOR THE DEMANDING PROFESSIONAL BROADCASTER


- 15 selectable fluid pan-tilt drag positions + 0.
- Continuous counterbalance control knob for perfect counterbalance adjustment.
- Perfect for payloads up to 75kg (165lbs) at 30 cm above central tilt axis.
- Fluid drag system with smooth start and soft stop technology & balanced diagonal transition.
- Two bubble levels.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- Quick release wedge plate for sturdy camera mounting (optional).
- Mitchell base for flat mounting.
- Robust all-alloy construction.
- Heavy duty, industry standard telescopic pan handles (optional).
- 3 year warranty.

SYSTEMS & COMPONENTS

3402	Skyline 90 Fluid Head (1085) Wedge Plate (3336) 2x Pan Handles (3342) Centre Screw/Nut (3346) Head Case (3382/3348) HD 1-St Alloy Tripod (3350) G Spreader (3363) Tripod Case (3380)
3404	Skyline 90 Fluid Head (1085) Wedge Plate (3336) 2x Pan Handles (3342) Centre Screw/Nut (3346) Head Case (3382/3348) HD 1-St Alloy Tripod (3350) AG Spreader (3360) Feet (3366) Tripod Case (3380)



Cat#: 3402

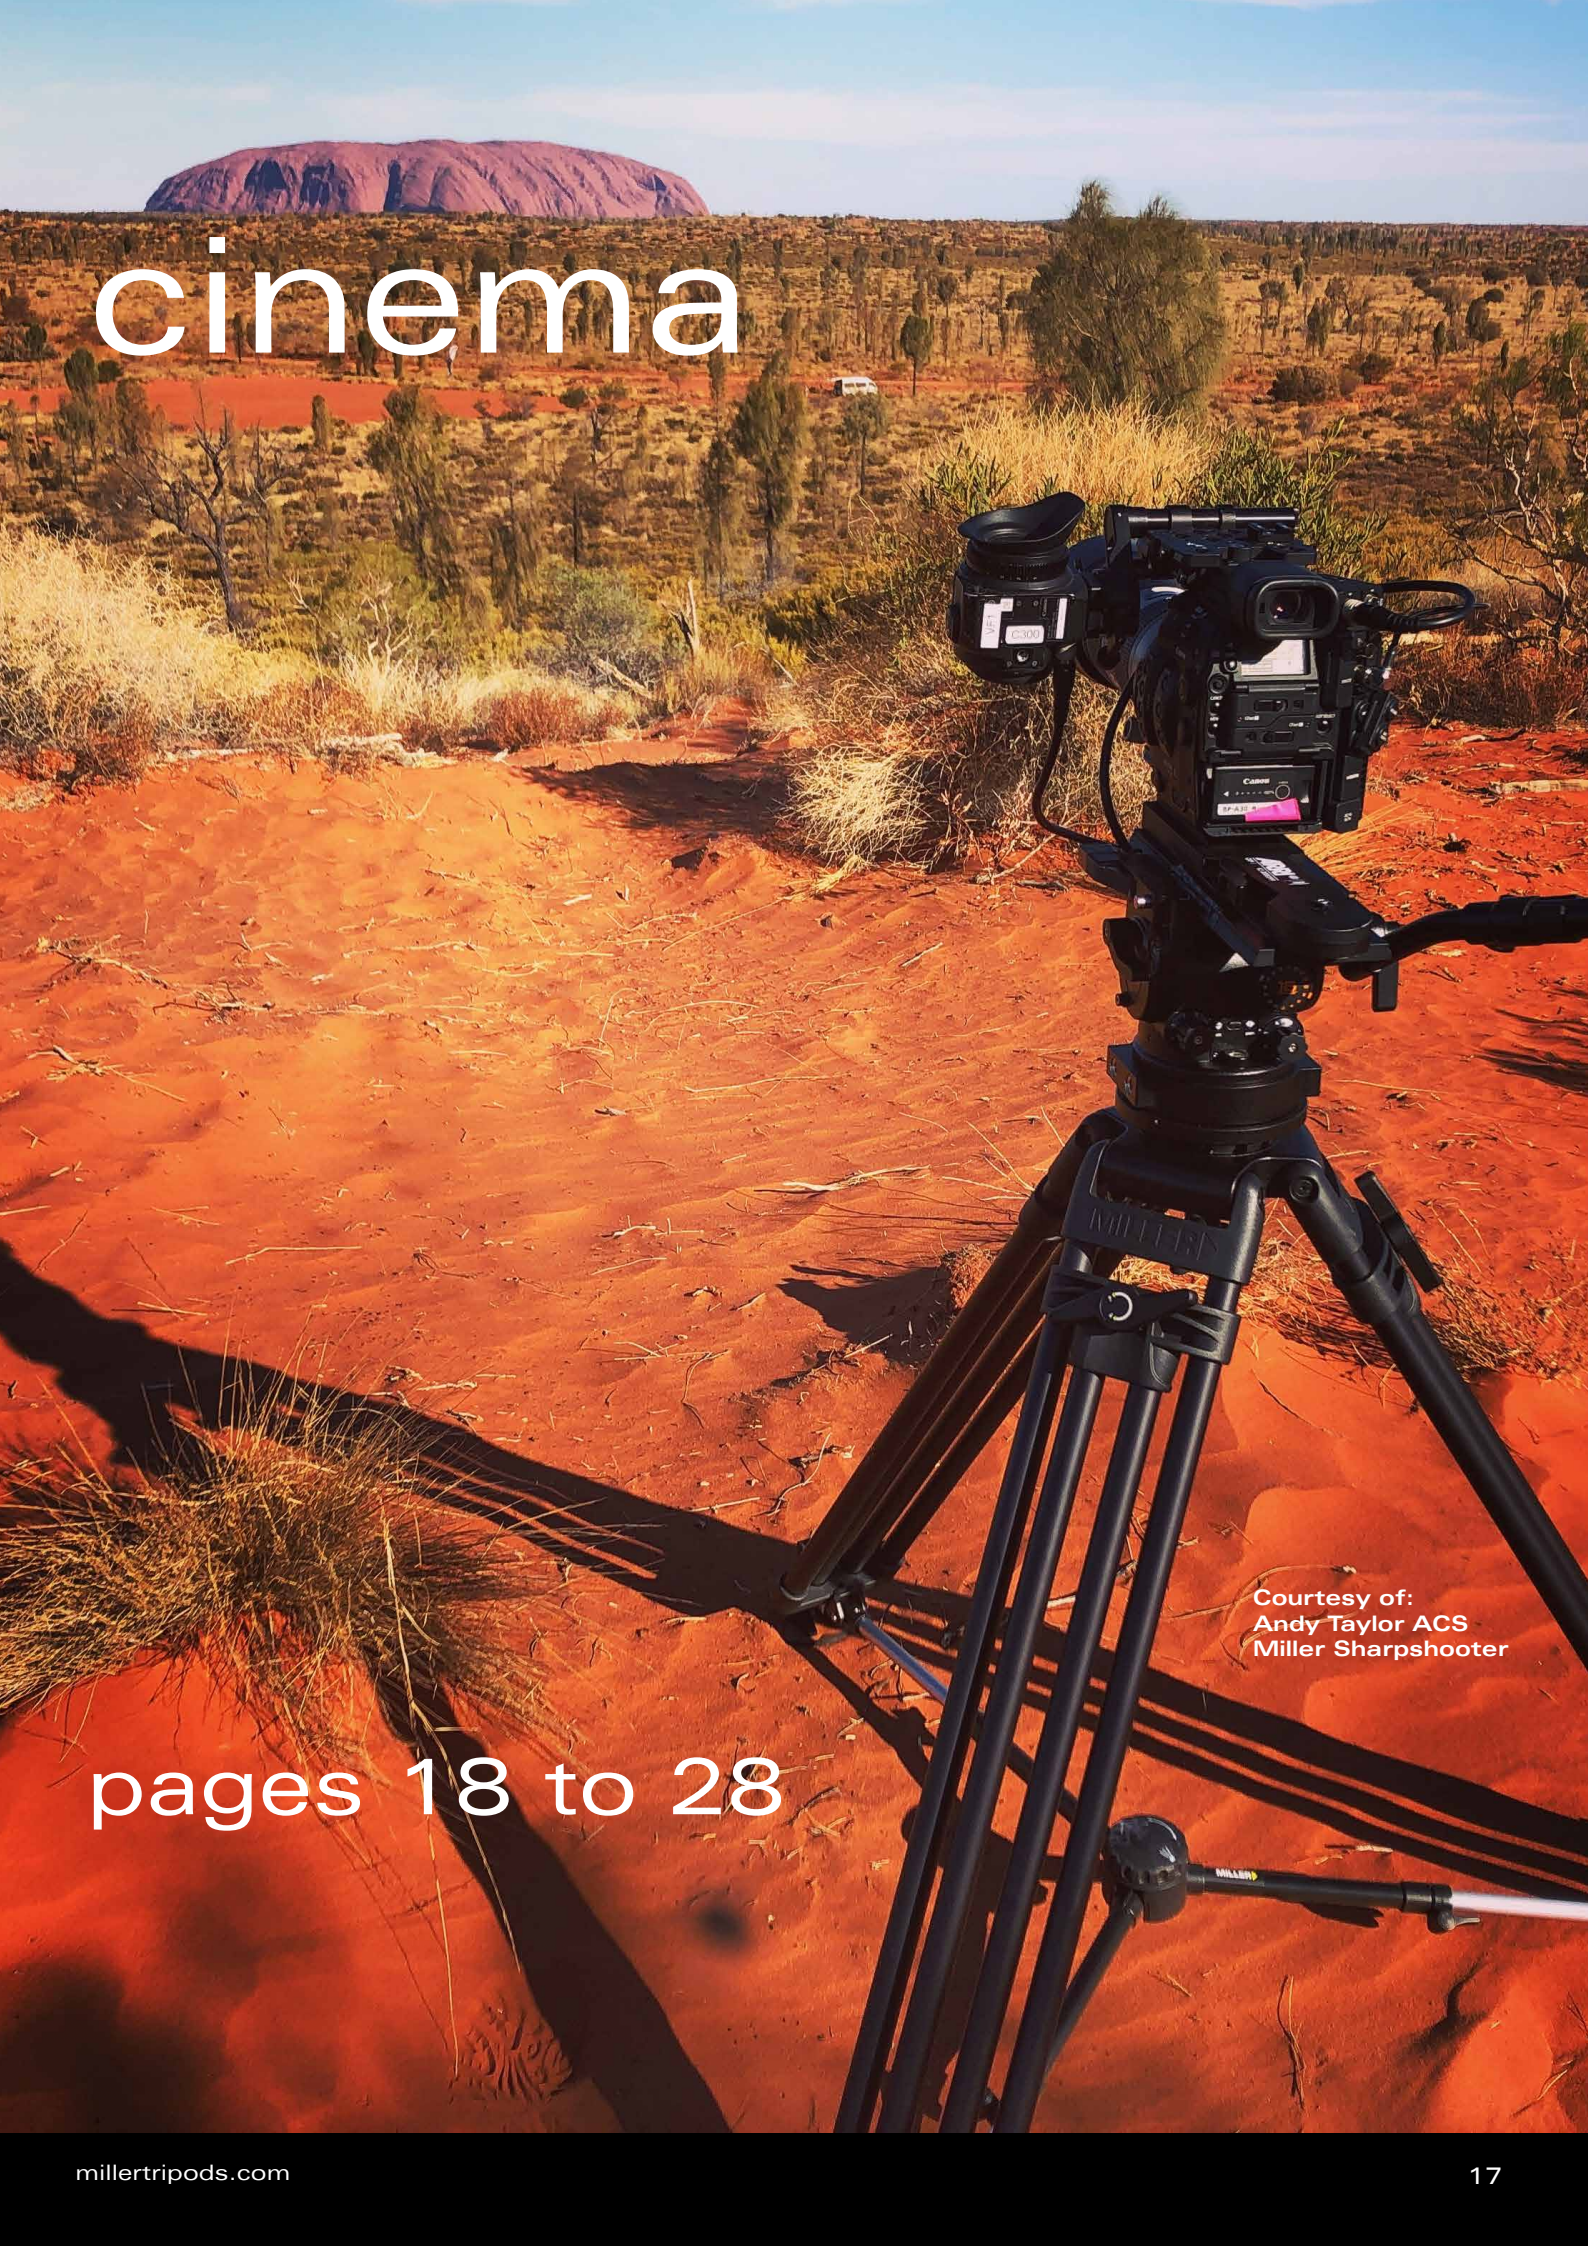A professional video camera, likely a Canon EOS R5, is mounted on a black Miller tripod. The camera is positioned on a red sandy dune in a desert landscape. In the background, the iconic Uluru rock formation is visible under a clear blue sky. The foreground shows the red sand and some dry grass. The word "cinema" is written in white lowercase letters in the upper left corner.

cinema

Courtesy of:
Andy Taylor ACS
Miller Sharpshooter

pages 18 to 28

naked series



COMES NAKED - OUR MOST CUSTOMISABLE VERSATILE HEAD

KEY ArtX FEATURES:

- Meets the needs of today's creatives
- Our most customisable fluid head
- Choose from Versa or Miller side load platforms
- Flat base std. or choose from 4 x types of tripod mounting bases.
- The Right Feel, smooth start, stop start, fluid drag technology
- Balanced diagonal transitions - pan and tilt smooth action
- 15+0 CB Plus™ selectable counter-balance positions
- Ergonomically located CB Plus switch
- Positive selection radial drag ring controls
- Illuminated bubble level
- Precise floating pan-tilt caliper locks ensure bounce free on-off performance
- Robust construction for rugged outdoor shooting conditions
- Two side mounting points for viewfinders and accessories
- Wear-resistant serrated rosette washer
- Three year full warranty
- Designed and manufactured in Australia

CHOOSE FROM THESE ELECTIVE HEAD COMPONENTS

VERSA STARTER KITS



3940

ARTX ACCESSORY KIT TO SUIT ARTX FLUID HEADS

Kit comprising of the popular options to customise a ArtX Naked Head with 1288 75mm claw ball, 1278 Versa camera platform and 679 fixed pan handle.

Note: Manfrotto 501PL camera plate is compatible with 1278 Versa sliding platform.



3943

ARTX ACCESSORY KIT TO SUIT ARTX FLUID HEADS

Kit comprising of the popular options to customise a ArtX Naked Head with 1290 100mm claw ball, 1278 Versa camera platform and 679 fixed pan handle.

Note: Manfrotto 501PL camera plate is compatible with 1278 Versa sliding camera platform.

MILLER STARTER KITS



3942

ARTX ACCESSORY KIT TO SUIT ARTX FLUID HEADS

Kit comprising of the popular options to customise a ArtX Naked Head with 1288 75mm claw ball, 1276 Miller camera platform and 679 fixed pan handle.



3944

ARTX ACCESSORY KIT TO SUIT ARTX FLUID HEADS

Kit comprising of the popular options to customise a ArtX Naked Head with 1290 100mm claw ball, 1276 Miller camera platform and 679 fixed pan handle.



1114 ArtX 3 fitted with 1276 Miller camera platform, 679 fixed pan handle and 1288 75mm clawball on a Solo 75 CF tripod



1116 ArtX 5 fitted with Miller camera platform 1276, fixed pan handle 679 and 100mm claw ball 1290 on a Sprinter tripod



1118 ArtX 7 fitted with 1276 Miller camera platform, 679 fixed pan handle 679 and 1290 100mm claw ball on a Sprinter II tripod

ARTX VERSATILITY FITS A RANGE OF TRIPODS

naked series

CHOOSE YOUR SET-UP WITH ARTX NAKED HEADS -
THEY FIT A RANGE OF CAMERA PLATES AND TRIPODS



	1114 ArtX 3	1116 ArtX 5	1118 ArtX 7
Weight (naked head only)	2.2kg (4.8lbs)	2.2kg (4.8lbs)	2.4kg (5.28lbs)
Payload range	0-8kg (0-17.5lbs)	0-10kg (0-22.0lbs)	0-14kg (0-30.8lbs)
Pan-tilt drag	3 selectable fluid drag positions + 0	3 selectable fluid drag positions + 0	5 selectable fluid drag positions + 0
Pan range	360°		
Pan-tilt locks	Positive lock calliper brake system		
Tilt angle	+90°/-75°		
Counterbalance	16 selectable positions (0 +15 position)		
Option 1: 1278 Camera platform	Complete with Versa Quick release, side load 1201 camera plate		
Sliding range with 1201 Camera platform	105mm (4.1") with 1201 camera plate		
Option 2: 1276 Camera platform	Complete with Miller Quick release, side load 1205 camera plate		
Sliding range with 1205 Camera platform	60mm (2.46") with 1205 camera plate		
Height w flat base	187mm (7.36") [with camera platform]		
Height w 100 claw ball	202mm (7.95") [with camera platform + 100 mm claw ball heights can vary with other options]		
Mounting base	Optional 1288 75mm, 1290 100mm, 1295 150mm or 1255 Mitchell Base		
Illuminated controls	Bubble Level		
Temperature range	-40° to +65°C (-40° to +149°F)		
Option 1: Pan handle 679 - fixed	Fixed 390mm (15.4")		
Option 2: Pan handle 696 - telescopic	Telescopic 390-590mm (15.4-23.2")		



1276
Miller camera platform side load with 1205 Miller camera plate and 60mm sliding range to suit ArtX and CompassX fluid heads series



1205
Miller camera plate (60mm sliding range) including 1/4" & 3/8" screws to suit 1276 Miller camera platform



1207
Long camera plate (120mm sliding range) including 1/4" & 3/8" screws to suit 1276 Miller camera platform



1209
Short camera plate (30mm sliding range) including 1/4" & 3/8" screws to suit 1276 Miller camera platform



1278
Versa camera platform side load with Versa 1201 Versa camera plate and 100mm sliding range to suit ArtX and CompassX fluid heads series



1201
Versa camera plate (105mm slider range) including 1/4", 3/8" screws & 3/8" screw to 1/4" pin to suit 1278 Versa camera



PN14223
3/8" Camera screw (long) to suit 1201 Versa camera plate



PN14222
1/4" Camera screw (long) to suit 1201 Versa camera plate



PN14224
3/8" Screw to 1/4" pin to suit 1201 Versa camera plate



679
Pan handle fixed with clamp to suit ArtX and CompassX fluid head series



696
Pan handle telescopic with clamp to suit ArtX and CompassX fluid head series



1248
Ø15 sleeve adaptor to suit Ø15 small rig rods fits into pan handle clamp



1288
75 Claw ball level to suit ArtX fluid head series



1290
100 Claw ball level to suit ArtX, ArrowFX, CiNX fluid heads series



1295
150 Claw ball level to suit ArtX, ArrowFX, CiNX fluid head series



1222
Arri mounting adaptor to suit ArtX and CompassX fluid head series



1255
Accessory mounting block kit to suit ArtX and CompassX fluid head series



1270
Accessory mounting block Arri kit to suit ArtX and CompassX Fluid head series




1236
Serr. handle clamp extension (D36 Arri) to suit ArtX and CompassX fluid head series



1238
Serr. handle clamp extension (Miller) to suit ArtX and CompassX fluid head series

1278 Versa camera platform includes 1201 Versa camera plate



1276 Miller camera platform includes 1205 Miller camera plate



679 Fixed pan handle



696 Telescopic pan handle




1255 CX Accessory mounting block kit



1114 ArtX 3 fluid head naked

1116 ArtX 5 fluid head naked

1118 ArtX 7 fluid head naked

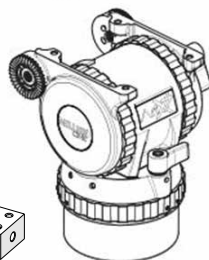

1288 75mm Claw ball



1290 100mm Claw ball



1225 Mitchell base adaptor





A MUST FOR SERIOUS FILMMAKERS WITH SMALL TO MEDIUM SIZE RIGS

- Modular flat base allows for Ø75, Ø100, Ø150 claw ball level & Mitchell Base.
- The Right Feel, smooth start, soft stop, fluid drag technology
- Balanced diagonal transitions - pan and tilt smooth action
- 15+0 CB Plus™ selectable counter-balance positions
- Ergonomically located CB Plus switch
- Side loading base plate with Versa camera plate 100mm of balance travel.
- Positive selection radial drag ring controls
- Illuminated bubble level
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance
- Robust construction for rugged outdoor shooting conditions
- Two side mounting points for viewfinders and accessories
- Wear-resistant easily replaceable serrated rosette washer
- Three year full warranty
- Designed and manufactured in Australia



	CiNX 20 Cat 1120	CiNX 23 Cat 1122	CiNX 25 Cat 1124
Weight	2.6kg (5.7lbs)	2.6kg (5.7lbs)	2.9kg (6.4lbs)
Payload range	0-8kg (0-17.5lbs)	0-10kg (0-22lbs)	0-14kg (0-30.9lbs)
Pan-tilt drag	3 selectable fluid drag positions + 0	3 selectable fluid drag positions + 0	5 selectable fluid drag positions + 0
Pan range	360°	360°	360°
Pan-tilt locks	Positive lock floating calliper brake system	Positive lock floating calliper brake system	Positive lock floating calliper brake system
Tilt angle	+90°/-75°	+90°/-75°	+90°/-75°
Counterbalance	16 selectable positions (15+0 position)	16 selectable positions (15+0 position)	16 selectable positions (15+0 position)
Camera platform	Side loading, Versa plate with 1/4" and 3/8" screws compatible with 501PL	Side loading, Versa plate with 1/4" and 3/8" screws compatible with 501PL	Side loading, Versa plate with 1/4" and 3/8" screws compatible with 501PL
Sliding range	100mm (2.4")	100mm (2.4")	100mm (2.4")
Height above bowl	201mm (7.9")	201mm (7.9")	200mm (7.9")
Mounting base	75mm (2.9") ball levelling standard or optional 100mm (Cat 1290) & 150mm (Cat 1295) claw balls or Mitchell Base Adaptor (Cat 1225)	75mm (2.9") ball levelling standard or optional 100mm (Cat 1290) & 150mm (Cat 1295) claw balls or Mitchell Base Adaptor (Cat 1225)	100mm (3.9") ball levelling standard or optional 75mm (Cat 1288) & 150mm (Cat 1295) claw balls or Mitchell Base Adaptor (Cat 1225)
Illuminated controls	Bubble Level	Bubble Level	Bubble Level
Temperature range	-40° to +65°C (-40° to +149°F)	-40° to +65°C (-40° to +149°F)	-40° to +65°C (-40° to +149°F)
Pan handle	Fixed 390mm (15.4")	Fixed 390mm (15.4")	Fixed 390mm (15.4")

Optional Accessories

696	Pan handle - telescopic with clamp
679	Pan handle - std with clamp
1201	Versa camera plate
1205	Miller Camera Plate
1222	Arri mounting adaptor ass'y
1225	Mitchell base adaptor
1236	Serrated hand clamp extension (Ø36 Arri)
1238	Serrated hand clamp extension (Miller)
1248	Ø15 Sleeve adaptor to suit Ø15 small rig rods
1255	Accessory mounting block kit
1270	Accessory mounting block kit Arri
1276	Miller camera platform SL w #1205 Miller camera plate
1278	Versa camera platform sl w #1201 Versa camera plate
1288	Ø75 Claw ball level
1290	Ø100 Claw ball level
1295	Ø150 Claw ball level

Spares

PN14222	Camera screw 1/4" (Long)
PN14223	Camera screw 3/8" (Long)
PN14224	3/8" screw to 1/4" pin



DESIGNED FOR FILMMAKERS

- Meets the needs of today's cinematographer.
- 3.8kg (8.4lbs) 4.1kg (9.0lbs) with 100mm claw ball (CiNX 3).
- 4.0kg (8.8lbs) 4.3kg (9.5lbs) with 100mm claw ball (CiNX 5 & 7).
- CiNX 3 payload 1-19kg (2.2-41.8lbs).
- CiNX 5 payload 2-21kg (4.4-46.2lbs).
- CiNX 7 payload 6-25kg (13.2-55lbs).
- Modular flat base allows for Ø100, Ø150 claw ball level & Mitchell Base.
- Side load camera platform - quick release Arri type dovetail.
- Modular flat base allows for Ø100, Ø150 claw ball level & Mitchell Base
- Ergonomically designed cine type pan and tilt locks with soft stop.
- Balanced diagonal pan and tilt transition with smooth start and soft stop fluid drag technology.
- 4 standard Arri type accessory mounting points.
- Lightweight rugged construction in a compact form.
- Patented 16 CB Plus™ technology.
- Illuminated bubble level and pan-tilt drag controls.
- Designed and manufactured in Australia.
- 3 year warranty.

SYSTEMS & COMPONENTS

3912	CiNX 3 Fluid Head (1103) MB adaptor with clamp (1225) 150mm Claw Ball (1295) 1 x Pan Handle (698) Accessory Mounting Block (1260) Articulated Pan Handle (1230) Pan Handle Clamp Extender (1238) Case to suit head and accessories (3602)
3914	CiNX 5 Fluid Head (1105) MB adaptor with clamp (1225) 150mm Claw Ball (1295) 1 x Pan Handle (698) Accessory Mounting Block (1260) Articulated Pan Handle (1230) Pan Handle Clamp Extender (1238) Case to suit head and accessories (3602)
3916	CiNX 7 Fluid Head (1107) MB adaptor with clamp (1225) 150mm Claw Ball (1295) 1 x Pan Handle (698) Accessory Mounting Block (1260) Articulated Pan Handle (1230) Pan Handle Clamp Extender (1238) Case to suit head and accessories (3602)
3802	CiNX 3 Fluid Head (1103) Solo-Q 100 3-St CF Tripod (2520) Strap (1520) 1 x Pan Handle (698) Softcase (3502)
3806	CiNX 3 Fluid Head (1103) HDC 100mm 1-St Alloy Tripod (2121G) Ground Spreader (2130)
3808	CiNX 3 Fluid Head (1103) HDC 100mm 1-St Alloy Tripod (2121) Mid-Level Spreader (993) 1 x Pan Handle (698) Feet (478) Smartcase (3615)
3814	CiNX 3 Fluid Head (1103) HDC 150mm 1-St Alloy Tripod (2115G) Ground Spreader (2130) 150mm Claw Ball (1295)
3820	CiNX 5 Fluid Head (1105) Sprinter II 2 STG Tripod (1576) Mid-level Spreader (993) Miller Smartcase (short) (3610) Rubber Feet (x3) (475)
3824	CiNX 5 Fluid Head (1105) HD 2-St Carbon Fibre Tripod (925) Mid-level spreader (993) Pan Handle (698) Shellcase (3534) Feet (475)
3832	CiNX 5 Fluid Head (1105) HDC 100mm 1-St Alloy Tripod (2121G) Ground Spreader (2130)
3834	CiNX 5 Fluid Head (1105) HDC 100mm 1-St Alloy Tripod (2121) Mid-Level Spreader (993) 1 x Pan Handle (698) Feet (478) Smartcase (3615)
3840	CiNX 5 Fluid Head (1105) HDC 150mm 1-St Alloy Tripod (2115G) Ground Spreader (2130) 150mm Claw Ball (1295) 1 x Pan Handle (698) Smartcase (3615)

SYSTEMS & COMPONENTS

3856	CiNX 7 Fluid Head (1107) HD 2-St Carbon Fibre Tripod (925) Mid-level spreader (993) Pan Handle (698) Shellcase (3534) Feet (475)
3865	CiNX 7 Fluid Head (1107) HDC 100mm 1-St Alloy Tripod (2121G) Ground Spreader (2130)
3867	CiNX 7 Fluid Head (1107) HDC 100mm 1-St Alloy Tripod (2121) Mid-Level Spreader (993) 1 x Pan Handle (698) Feet (478) Smartcase (3615)
3876	CiNX 7 Fluid Head (1107) HDC 150mm 1-St Alloy Tripod (2115G) Ground Spreader (2130) 150mm Claw Ball (1295) 1 x Pan Handle (698) Smartcase (3615)
3878	CiNX 7 Fluid Head (1107) HDC 150mm 1-St Alloy Tripod (2115) Mid-Level Spreader (993) 150mm Claw Ball (1295) 1 x Pan Handle (698) Feet (478) Smartcase (3615)
3886	CiNX 7 Fluid Head (1107) HDC MB 1-St Alloy Tripod (2110G) Ground Spreader (2130) MB adaptor with clamp (1225) 1 x Pan Handle (698) Smartcase (3615)
3888	CiNX 7 Fluid Head (1107) HDC MB 1-St Alloy Tripod (2110) Mid-Level Spreader (993) MB adaptor with clamp (1225) 1 x Pan Handle (698) Feet (478) Smartcase (3615)





FOR CINEMATOGRAPHERS WHO PREFER BALL LEVELLING

- 7 selectable of fluid pan-tilt drag positions plus zero.
- 16 selectable positions of counterbalance.
- Perfect for payloads to 4.5-40kg (9.9-88lbs).
- Fluid drag system with smooth start and soft stop technology and balanced diagonal transition.
- Controls "all in one location" design for fast easy and practical use.
- Unique all illuminated bubble level, pan-tilt drag and counterbalance controls.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- High precision ball bearing supported pan-tilt movement.
- Side loading camera platform, 150mm travel with Arri type camera plate.
- Front mount adaptor for camera assistant's accessory box.
- Comes with 150mm clawball
- Mitchell base adaptable.
- Robust construction for rugged outdoor shooting conditions.
- Dual HD telescopic pan handles.
- Two side mounting points for viewfinders and accessories.
- 3 year warranty.

SYSTEMS & COMPONENTS

2094 CinX 8 Fluid Head (1057) HDC 150 1-St Alloy Tripod (2115G) HDC Ground Spreader (2130) 2 x HD Pan Handle (698)





FOR SERIOUS CREATIVES WHO REQUIRE FLEXIBILITY

- 7 selectable of fluid pan-tilt drag positions plus zero.
- 16 selectable positions of counterbalance.
- Perfect for payloads to 4.5-40kg 9.9-88lbs .
- Fluid drag system with smooth start and soft stop technology and balanced diagonal transition.
- Controls "all in one location" design for fast easy and practical use.
- Modular flat base allows for Ø150 claw ball level & Mitchell base
- Unique all illuminated bubble level, pan-tilt drag and counterbalance controls.
- Precise floating pan-tilt calliper locks ensure bounce free on-off performance.
- High precision ball bearing supported pan-tilt movement.
- Side loading camera platform, 150mm travel with Arri type camera plate.
- Front mount adaptor for camera assistant's accessory box.
- Robust construction for rugged outdoor shooting conditions.
- Dual HD telescopic pan handles.
- Two side mounting points for viewfinders and accessories.
- 3 year warranty.

SYSTEMS & COMPONENTS

2096 CinX 9 Fluid Head (1059) HDC MB 1-St Alloy Tripod (2110G) HDC Ground Spreader (2130) MB adaptor with clamp (1225) 2 x HD Pan Handle (698)



▶ STEP INTO CINEMATIC MODE

with mobility and stability in mind.

CINX 5

interchangeable
mounts, ø100mm,
ø150mm
or Mitchell

payload range:
4.4 - 46.2lbs

weight:
9.5lbs

counterbalance:
16 selectable
positions

pan/tilt drag:
7 selectable
fluid drag
positions + 0

a pair of Arri
pin 3/8 mounts
on points on
both sides



SPRINTER II

handling up
to 100lbs

100mm bowl


dual leg
locks

carry
handle

carbon
fibre

mid-level
spreader

foot spikes
and rubber feet

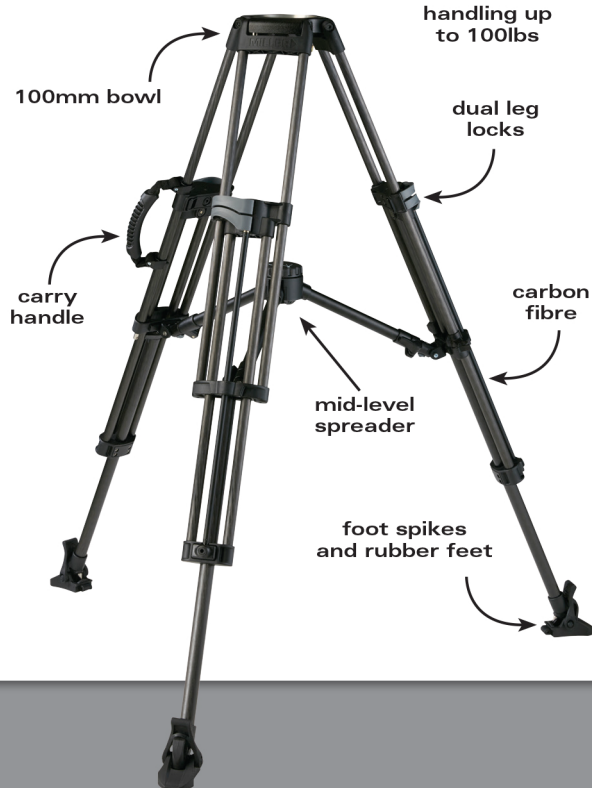

▶ LIGHTWEIGHT AND ROBUST


that will change your filmmaking game.



pan and tilt levers
close to each other
for one-hand
operation



In-line carry handle

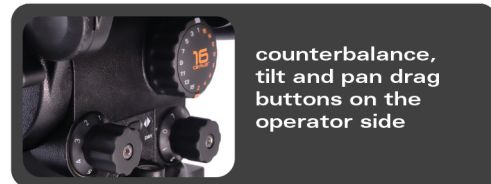

counterbalance,
tilt and pan drag
buttons on the
operator side



both leg locks
always together
for easy and fast
deployment



side load quick
release
camera plate

System #3820 Includes

- #1105 CiNX 5 Fluid Head
- #1576 Sprinter II 2 STG Tripod
- #993 Mid-Level Spreader
- #3610 Miller Smart Case (Short)
- #475 Rubber Feet (x3)

A professional video camera with a large lens is mounted on a black tripod. The camera is positioned in the upper left of the frame, pointing towards the right. The tripod is set up in a field of tall, dry grass and green foliage. In the background, a hillside with a crowd of people is visible under a clear sky. The text 'tripods pedestals & accessories' is overlaid in large white letters across the middle of the image.

tripods pedestals & accessories

Courtesy of:
André Almeida
Miller Sharpshooter

pages 30 to 50



LIGHT WEIGHT & PORTABLE

- Compact and portable with carry handle for dolly.
- Simple and easy to setup and use.
- Air adjustable column system for quick payload balancing.
- Quick action column lock.
- Smooth 350mm (13.8") stroke.
- Independent 125mm dolly wheel brake system.
- Sturdy adjustable cable guards.
- Steering wheel diameter 294mm (11.6").
- Dolly tracking width 920mm (36.2").
- Portable hand pump not included.
- Includes 481 Studio Dolly.

SYSTEMS & COMPONENTS

1971	System Arrow® 3 Combo Pedestal - fluid head payload range 1kg - 19kg (2.2lbs - 41.8lbs)
1978	System Arrow® 5 Combo Pedestal - fluid head payload range 2kg - 21kg (4.4lbs - 46.2lbs)
1985	System Arrow® 7 Combo Pedestal - fluid head payload range 6kg - 25kg (13.2lbs -55lbs)
3797	System CX10 Combo Pedestal (1960) - fluid head payload range 0kg - 12kg (0lbs - 26.4lbs)
3799	System CX14 Combo Pedestal (1960) - fluid head pauload range 0kg - 14kg (0lbs - 30.8lbs)
4175	System CXV10 Fluid Head (1144) Versa Camera Plate (1201) Combo Pedestal (1950) Dolly (481)
4179	System CXV14 Fluid Head (1147) 2 x Pan Handles (696) Versa Camera Plate (1201) Combo Pedestal (1950) Dolly (481)



Cat#: 3797



COMPACT & PORTABLE LIVE SHOT


- Compact and portable with carry handle for column & dolly.
- Wide height range 810mm (31.8") up to 1690mm (66.5") with extension (opt.).
- Precise, smooth and low noise in-shot column with 450mm (17.7") stroke.
- Simple and easy to setup and use with drag control knob pressure column and lock lever pressure column.
- Air adjustable column system for quick payload balancing.
- Independent dolly wheel axle brake system eliminates wheel tyre indents.
- Multiple wheel positions for linear or radius dolly tracking.
- 125mm (4.9") dual ball bearing wheels for quick swivel-turn action.
- Center hub locking column with adjustable spider arm supports.
- Steering wheel diameter 294mm (11.6").
- Dolly tracking width 970mm (38.2").
- Sturdy adjustable cable guards.
- Portable hand pump with pressure gauge.

SYSTEMS & COMPONENTS

3250	System Arrow [®] 5 Combo Live 30 Pedestal - fluid head payload range 2kg - 21kg (4.4lbs - 46.2lbs)
3260	System Arrow [®] 7 Combo Live 30 Pedestal - fluid head payload range 6kg - 25kg (13.2lbs - 55lbs)
3800	System CX14 Combo Live 30 Pedestal - fluid head payload range 0kg - 14kg (0lbs - 30.8lbs)
4180	CXV14 Fluid Head (1147) 2 x Pan Handles (696) Versa Camera Plate (1201) Combo Live 30 Pedestal (3220)



Cat#: 3250

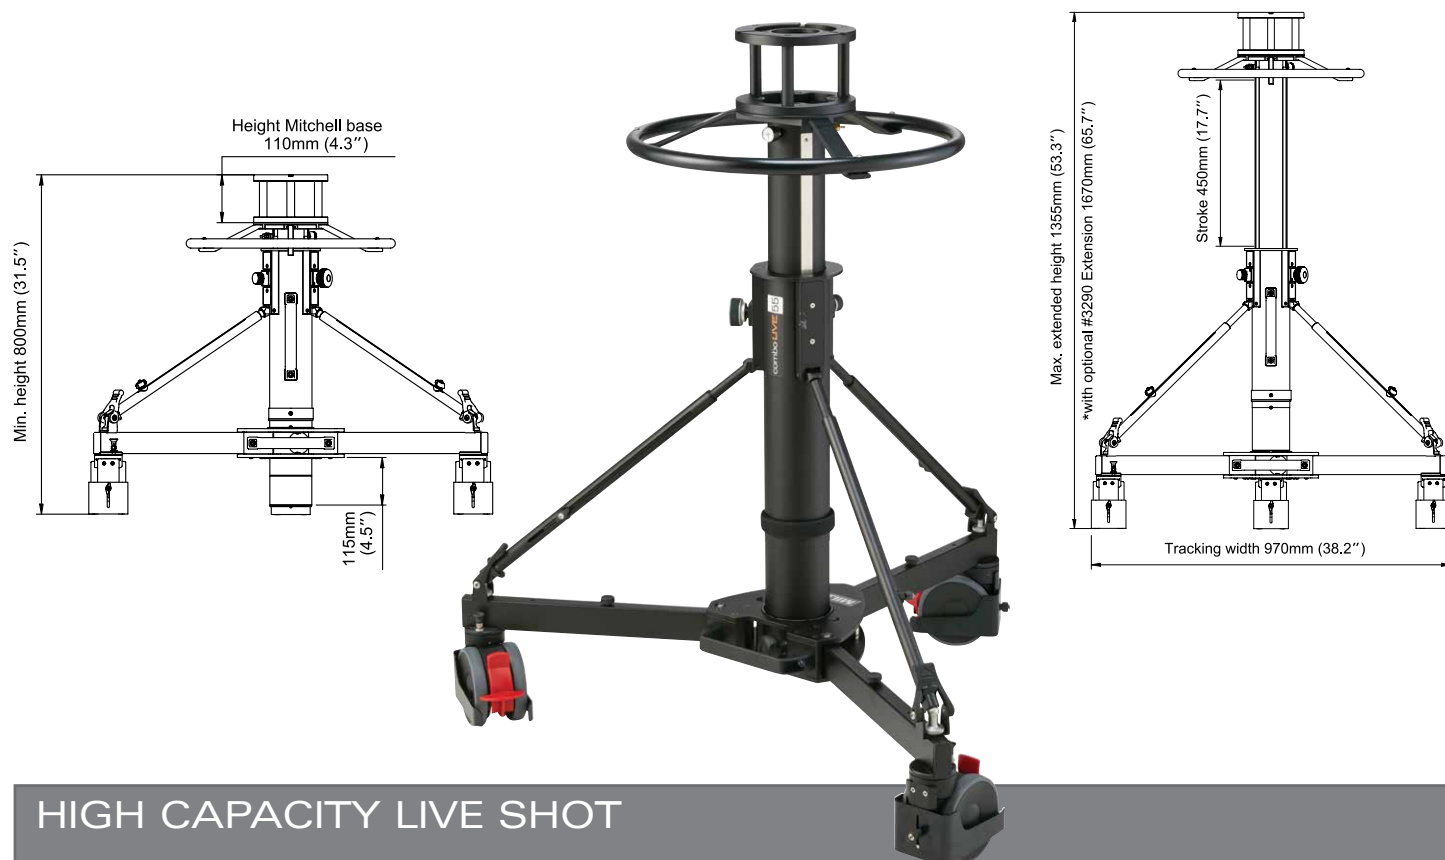

HIGH CAPACITY LIVE SHOT

- Compact and portable with carry handle for column & dolly.
- Wide height range 790mm (31.1") up to 1670mm (65.7") with extension (opt.).
- Precise, smooth and low noise In-shot column with 450mm (17.7") stroke.
- Simple and easy to setup and use with drag control knob pressure column and lock lever pressure column.
- Air adjustable column system for quick payload balancing.
- Independent dolly wheel axle brake system eliminates wheel tyre indents.
- Multiple wheel positions for linear or radius dolly tracking.
- 125mm (4.9") dual ball bearing wheels for quick swivel-turn action.
- Center hub locking column with adjustable spider arm supports.
- Steering wheel diameter 494mm (19.4").
- Dolly tracking width 970mm (38.2").
- Sturdy adjustable cable guards.
- Portable hand pump with pressure gauge

SYSTEMS & COMPONENTS

3272 SkyX 8 Fluid Head (1052) 2 x HD Pan Handles (698) Camera Plate Lrg Euro (1060) MB adaptor with clamp (1225)



2500

Solo-Q 75 2-stage tripod (carbon fibre)



20kg
44.1lbs



2.5kg
5.5lbs



242-1630mm
9.5-64.2"



75mm
2.9"



700mm
27.6"



Specifications:

Leg extension	2-stage telescopic
Lock type	Concentric rapid lock
Leg material	Carbon fibre

2520

Solo-Q 100 3-stage tripod (carbon fibre)



30kg
66lbs



3.0kg
6.6lbs



228-1879mm
9.0-74.0"



100mm
3.9"



663mm
26.1"



Specifications:

Leg extension	3-stage telescopic
Lock type	Concentric rapid lock
Leg material	Alloy

1630

Solo 75 2-stage tripod (alloy)



20kg
44.1lbs



2.9kg
6.4lbs



234-1625mm
9.2-64"



75mm
2.9"



700mm
27.6"



Specifications:

Leg extension	2-stage telescopic
Lock type	Concentric rapid lock
Leg material	Alloy

2505

Solo-Q 75 3-stage tripod (carbon fibre)



20kg
44.1lbs



3kg
6.6lbs



228-1879mm
9.0-74.0"



75mm
2.9"



663mm
25.9"



Specifications:

Leg extension	3-stage telescopic
Lock type	Concentric rapid lock
Leg material	Carbon fibre

2515

Solo-Q 100 2-stage tripod (carbon fibre)



30kg
66lbs



2.5kg
5.5lbs



242-1630mm
9.5-64.2"



100mm
3.9"



700mm
25.9"



Specifications:

Leg extension	2-stage telescopic
Lock type	Concentric rapid lock
Leg material	Carbon fibre

314

Solo-Q pod 3-stage (carbon fibre)



10kg
22lbs



1kg
2.2lbs



585-1735mm
23-68.3"



66mm
2.6"



585mm
23"



Specifications:

Leg extension	3-stage telescopic
Lock type	Concentric rapid lock
Leg material	Carbon fibre

*Monopod Base Stand on page 46

Q-LOCK

Patented design for Quick operation.
Just push the yellow button to drop the legs.
Set up the height by locking the quarter-turn rapid-locks.
Unlock the rapid-locks, push the legs back up for automatic lock & storage.



402 / 402G

Toggle 2-stage tripod (alloy)



25kg
55lbs



3.0kg
6.6lbs



390-1560mm
15.4-61.4"



100mm
3.9"



690mm
27.2"



Specifications:

Leg extension 2-stage

Lock type Toggle

Leg material Alloy

420 / 420G

Toggle 75 2-stage tripod (alloy)



25kg
55lbs



3.0kg
6.8lbs



390-1560mm
15.4-61.4"



75mm
2.9"



690mm
27.2"



Specifications:

Leg extension 2-stage

Lock type Toggle

Leg material Alloy

440 / 440G

Toggle 75 LW tripod (alloy)



20kg
44lbs



2.5kg
5.5lbs



620-1330mm
24.4-52.4"



75mm
2.9"



830mm
32.7"



Specifications:

Leg extension 1-stage

Lock type Toggle

Leg material Alloy

455

100 Baby 2-stage tripod (alloy) with spreader & bag



25kg
55lbs



2.8kg
6.1lbs



250-520mm
9.8-20.5"



100mm
3.9"



350mm
13.8"



Specifications:

Leg extension 2-stage

Lock type Toggle

Leg material Alloy

456

75 Baby 2-stage tripod (alloy) with spreader & bag



25kg
55lbs



2.8kg
6.1lbs



250-520mm
9.8-20.5"



75mm
3.9"



350mm
13.8"



Specifications:

Leg extension 2-stage

Lock type Toggle

Leg material Alloy

1576 / 1576G

Sprinter II 2-stage tripod (carbon fibre)



45kg
100lbs



3.2kg
7.0lbs



440-1530mm
17.3-60.4"



100mm
3.9"



700mm
27.6"



Specifications:

Leg extension 2-stage

Lock type HS dual action

Leg material Carbon fibre

1580 / 1580G

Sprinter II 2-stage tripod (alloy)



45kg
100lbs



3.8kg
8.3lbs



440-1530mm
17.3-60.4"



100mm
3.9"



700mm
27.6"



Specifications:

Leg extension 2-stage

Lock type HS dual action

Leg material Alloy

1589 / 1589G

Sprinter II 1-stage tripod (alloy)



45kg
100lbs



3.2kg
7.0lbs



665-1430mm
26.2-56.3"



100mm
3.9"



840mm
33.1"



Specifications:

Leg extension 1-stage

Lock type HS single action

Leg material Alloy

1620 / 1620G

75 Sprinter II 2-stage (carbon fibre)



30kg
66lbs



3.2kg
7.0lbs



600-1530mm
23.6-60.4"



75mm
2.9"



700mm
27.6"



Specifications:

Leg extension 2-stage

Lock type HS dual action

Leg material Carbon fibre



925

HD 2-stage tripod (carbon fibre)



95kg
210lbs



4.5kg
9.9lbs



480-1590mm
18.9-62.6"



100mm
3.9"



750mm
29.5"



Specifications:

Leg extension	2-stage
Lock type	Flip lock
Leg material	Carbon fibre

932

HD 1-stage studio tripod (alloy)



95kg
210lbs



4.7kg
10.4lbs



590-1270mm
23.2-50.0"



100mm
3.9"



782mm
30.8"



Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy

937

HD 150 2-stage tripod (carbon fibre)



95kg
210lbs



4.6kg
10.1lbs



520-1615mm
20.5-63.6"



150mm
5.9"



750mm
29.5"



Specifications:

Leg extension	2-stage
Lock type	Flip lock
Leg material	Carbon fibre

943

HD 150 1-stage tripod (alloy)



95kg
210lbs



5.35kg
11.8lbs



800-1590mm
31.5-62.6"



150mm
5.9"



940mm
37.0"



Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy

931

HD 1-stage tripod (alloy)



95kg
210lbs



5.4kg
11.9lbs



785-1575mm
30.9-62.0"



100mm
3.9"



930mm
36.6"



Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy

935

HD 1-stage mini tripod (alloy)



95kg
210lbs



4.0kg
8.8lbs



350-960mm
13.7-37.7"



100mm
3.9"



645mm
25.3"



Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy

938

HD MB 2-stage (carbon fibre)



95kg
210lbs



5.2kg
1.5lbs



520-1615mm
20.5-63.6"



Mitchell
base



750mm
29.5"



Specifications:

Leg extension	2-stage
Lock type	Flip lock
Leg material	Carbon fibre

944

HD 150 1-stage studio tripod (alloy)



95kg
210lbs



4.8kg
10.6lbs



610-1280mm
24.0-50.4"



150mm
5.9"



790mm
31.1"



Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy

945
HD 150 1-stage mini tripod (alloy)

				
95kg	4.2kg	350-970mm	150mm	650mm
210lbs	9.25lbs	14.6-38.2	5.9"	25.6"

Specifications:

Leg extension	1-stage
Lock type	Flip lock
Leg material	Alloy



3350
HD tripod (alloy)

				
40.0kg	9.0kg	625-1310mm	Mitchell	830mm
08.7lbs	19.8lbs	24.6-51.6"	base	32.7"

Specifications:

Leg extension	1-stage
Lock type	Rotary lock
Leg material	Alloy



3354
HD studio tripod (alloy)

				
140.0kg	8.4kg	700-1100mm	Mitchell	680mm
308.7lbs	18.5lbs	27.6-43.3"	base	26.8"

Specifications:

Leg extension	1-stage
Lock type	Rotary lock
Leg material	Alloy



HDC | 100 / 150mm / MITCHELL BASE

2109

HDC MB 1-stage short (alloy)



95kg
210lbs



4.8kg
10.6lbs



365-910mm
14.4-35.8"



Mitchell
base



610mm
24.0"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2109G

HDC MB 1-stage short (alloy)



95kg
210lbs



4.8kg
10.6lbs



415-900mm
16.4-35.4"



Mitchell
base



640mm
25.2"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2110

HDC MB 1-stage (alloy)



95kg
210lbs



5.9kg
13.2lbs



800-1550mm
31.5-61.0"



Mitchell
base



916mm
36.1"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2110G

HDC MB 1-stage (alloy)



95kg
210lbs



5.9kg
13.2lbs



737-1549mm
29.0-61.0"



Mitchell
base



946mm
37.2"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2111

HDC MB 1-stage tall (alloy)



95kg
210lbs



6.4kg
14.1lbs



925-1775mm
36.4-70.0"



Mitchell
base



1010mm
39.8"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2111G

HDC MB 1-stage tall (alloy)



95kg
210lbs



6.4kg
14.1lbs



886-1764mm
34.9-69.5"



Mitchell
base



1040mm
41.0"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2114

HDC 150 1-stage short (alloy)



95kg
210lbs



4.5kg
9.9lbs



355-900mm
14.0-35.0"



150mm
5.9"



600mm
23.6"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



2114G

HDC 150 1-stage short (alloy)



95kg
210lbs



4.5kg
9.9lbs



405-890mm
16.0-35.0"



150mm
5.9"



630mm
24.8"

Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy



HDC | 100 / 150mm / MITCHELL BASE

2115

HDC 150 1-stage (alloy)



95kg
210lbs



5.6kg
12.4lbs



790-1540mm
31.1-60.6"



150mm
5.9"



906mm
35.7"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2115G

HDC 150 1-stage (alloy)



95kg
210lbs



5.6kg
12.4lbs



727-1539mm
28.2-60.6"



150mm
5.9"



936mm
36.9"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2116

HDC 150 1-stage tall (alloy)



95kg
210lbs



6.2kg
13.7lbs



915-1765mm
46.0-69.5"



150mm
5.9"



1000mm
39.4"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2116G

HDC 150 1-stage tall (alloy)



95kg
210lbs



6.2kg
13.7lbs



876-1754mm
34.5-69.1"



150mm
5.9"



1030mm
40.6"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2120

HDC 100 1-stage short (alloy)



95kg
210lbs



4.3kg
9.5lbs



315-895mm
12.4-35.2"



100mm
3.9"



600mm
23.6"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2120G

HDC 100 1-stage short (alloy)



95kg
210lbs



4.3kg
9.5lbs



370-900mm
14.6-35.4"



100mm
3.9"



630mm
24.8"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2121

HDC 100 1-stage (alloy)



95kg
210lbs



5.4kg
11.9lbs



770-1537mm
30.3-60.1"



100mm
3.9"



906mm
35.7"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

2121G

HDC 100 1-stage (alloy)



95kg
210lbs



5.4kg
11.9lbs



710-1539mm
28.0-60.6"



100mm
3.9"



936mm
36.9"



Specifications:

Leg extension	1-stage
Lock type	Quick action rotary lock
Leg material	Alloy

HDC | 100 / 150mm / MITCHELL BASE

2122 HDC 100 1-stage tall (alloy)

95kg
210lbs

6.0kg
13.2lbs

890-1755mm
35.0-69.1"

100mm
3.9"

1000mm
39.4"

Specifications:

Leg extension

1-stage

Lock type

Quick action rotary lock

Leg material

Alloy

2122G HDC 100 1-stage tall (alloy)

95kg
210lbs

6.0kg
13.2lbs

845-1690mm
33.3-66.5"

100mm
3.9"

1030mm
40.6"

Specifications:

Leg extension

1-stage

Lock type

Quick action rotary lock

Leg material

Alloy



SPREADERS | STUDIO DOLLIES

411 On ground spreader to suit Toggle

		
0.7kg 1.5lbs	420mm 16.5"	910 - 1310mm 31.8" - 51.6"



508 Above ground spreader to suit Toggle 2-stage

		
0.4kg 0.88lbs	320mm 12.5"	630 - 1060mm 24.8 - 41.7"



835 DS tripod spreader to suit Toggle LW

		
0.2kg 0.44lbs	290mm 11.4"	580mm 22.8"



2130 HDC ground spreader to suit HDC

		
2.0kg 4.4lbs	433mm 17.04"	866 - 1346mm 34.1" - 52.9"



390 MD pro dolly to suit Toggle 2-stage

			
45kg 99lbs	4.2kg 9.3lbs	640mm 25.2"	914mm 36.0"



394 Solo dolly to suit all Solo

			
25kg 55lbs	2.5kg 5.5lbs	560mm 22.0"	914mm 36.0"



481 Studio dolly with cable guards to suit Sprinter II & HD

			
100kg 220lbs	6.6kg 14.6lbs	610mm 24.0"	1072mm 42.2"



3222 HD dolly to suit HD & Sprinter II tripods

			
200kg 440.9lbs	9.5kg 20.9lbs	760mm 29.9"	1120mm 44.1"



470 On ground spreader to suit Sprinter II

		
0.65kg 1.3lbs	445mm 17.5"	910 - 1310mm 31.8" - 51.6"



593 LW mid level spreader to suit 75mm Sprinter II

		
0.35kg 0.88lbs	200mm 7.9"	400-640mm 15.8-25.2"



993 Mid level spreader to suit Sprinter II & HD

		
0.79kg 1.74lbs	320mm 12.5"	600 - 1000mm 23.6" - 39.3"



2132 HDC ground spreader short to suit HDC

		
1.8kg 4.0lbs	433mm 17.0"	866-1146mm 34.1-45.1"



391 LW pro dolly to suit Toggle LW

			
25kg 55lbs	2.6kg 5.7lbs	560mm 22.0"	914mm 36.0"



480 Studio dolly to suit Sprinter II & HD

			
100kg 220lbs	6.2kg 13.7lbs	610mm 24.0"	1072mm 42.2"



483 Tracker dolly with cable guards to suit Sprinter II & HD

			
100kg 220lbs	6.9kg 15.2lbs	610mm 24.0"	1072mm 42.2"



3225 HD dolly to suit 3354 HD studio tripod

			
200kg 440.9lbs	10.1kg 22.3lbs	760mm 29.9"	1120mm 44.1"



HI HATS | PAN HANDLES

465

Ø75 Hi hat
with Ø75 tripod bowl



20kg
44.1lbs



1kg
2.2lbs



75mm
2.9"



150mm
5.9"



466

Ø100 Hi hat
with Ø100 tripod bowl



25kg
55lbs



1kg
2.2lbs



100mm
5.9"



150mm
5.9"



467

150 Hi hat
with Ø150 tripod bowl



40kg
88lbs



2.2kg
4.8lbs



150mm
5.9"



151mm
5.9"



679

Pan handle - fixed
with clamp to suit CompassX, CXV and ArtX
fluid head series



0.28kg
0.61lbs



390mm
15.4"



681

Pan handle - fixed
with grey clamp to suit DS10/20 fluid heads



0.25kg
0.55lbs



390mm
15.4"



682

Pan handle - fixed
with black clamp to suit AiR and AiRV fluid head



0.26kg
0.57lbs



390mm
15.4"



696

Pan handle - telescopic
with clamp to suit CompassX, CXV, ArtX, ArrowX,
CiNX 3, 5 & 7 and ArrowFx fluid head series



0.38kg
0.83lbs



390mm
15.4"



590mm
23.2"



698

Pan handle (HD) - telescopic
with clamp to suit SkyX 8 and CiNX 8 & 9 fluid heads



0.46kg
1.01lbs



430mm
16.9"



630mm
24.8"



1230

Pan handle - articulated with extender
to suit CiNX 8 & 9, SkyX 8 and ArrowX fluid head series



0.72kg
1.59lbs



380mm
15.0"



1234

Pan handle - short grip
to suit CiNX 8 & 9, SkyX 8 and ArrowX fluid head series



0.39kg
0.86lbs



210mm
8.3"



1240

Pan handle (19mm OB) - telescopic, with #1238
extender and clamp to suit SkyX 8, CiNX 8 & 9 fluid heads



0.86kg
1.89lbs



520mm
20.5"



710mm
28.0"



3342

Pan handle (22mm OB) - telescopic
with clamp to suit Skyline 90 fluid head



1.0kg
2.2lbs



520mm
20.5"



710mm
28.0"



1242

Pan handle (19mm OB) - telescopic
with clamp to suit SkyX 8, CiNX 8 & 9 fluid heads



0.86kg
1.89lbs



520mm
20.5"



710mm
28.0"



CAMERA PLATES

1201

Versa camera plate
to suit 1276 Versa camera platform for CompassX, CXV
and ArtX fluid head series



0.13kg
0.29lbs



140 x 50 x 11mm
5.5 x 1.9 x 0.43"



1/4" and
3/8" screws



1207

Miller camera plate (long)
to suit CompassX and ArtX fluid head series with 1278
Miller camera platform



0.14kg
0.31lbs



180 x 48.5 x 11mm
7.1 x 1.9 x 0.43"



1/4" and 3/8" screw



1209

Camera plate (short)
to suit AIR, DS10/20, Compass and CompassX fluid heads



0.08kg
0.18lbs



90 x 48.5 x 11mm
3.5 x 1.9 x 0.43"



860

Camera plate (Euro)
to suit Arrow^x, Arrow fluid heads & 1210X adaptor



0.08kg
0.17lbs



79.5 x 65 x 6mm
3.1 x 2.5 x 0.23"



1/4" & 3/8"
screws



1065

CiNX Camera plate (Arri)
to suit CiNX 8 & 9 fluid heads



0.60kg
1.322lbs



260 x 95.5 x 11.7mm
10.2 x 3.75 x 0.46"



2 x 3/8"
screws



3336

Wedge plate assembly
to suit Skyline 90 fluid head



0.85kg
1.87lbs



254 x 155 x 12mm
10.0 x 6.10 x 0.47"



1205

Miller camera plate
to suit AiR, DS10/20, CompassX and ArtX fluid head series with
1278 Miller camera platform



0.08kg
0.18lbs



120 x 48.5 x 8mm
4.7 x 1.9 x 0.31"



1/4" and
3/8" screws



1208

Camera plate (Mini Euro)
to suit 1206X adaptor



0.05kg
0.11lbs



62 x 48.5 x 6mm
2.4 x 1.9 x 0.23"



1/4" and
3/8" screws



858

Offset camera plate
to suit offset camera payloads



0.25kg
0.55lbs



160 x 80 x 7.5mm
6.2 x 3.1 x 0.29"



2 x 3/8" screws



1060

Camera plate (Large Euro)
to suit SkyX 8 fluid head



0.18kg
0.39lbs



120 x 80 x 7.4mm
4.7 x 3.1 x 0.29"



2 x 3/8"
screws



1066

CiNX camera plate assembly side load (Arri type
short) to suit CiNX 8 & 9 fluid heads



0.45kg
1.01lbs



200 x 95 x 12mm
7.87 x 3.74 x 0.47"



2 x 3/8"
screws



SLIDING PLATES | PLATFORMS

1206X

Sliding plate assembly (Mini Euro)
to suit CompassX fluid heads



0.26kg
0.57lbs



160 x 80 x 36mm
6.2 x 3.1 x 1.4"



1210X

Sliding plate assembly (Euro)
to suit Compass & Compass* fluid heads



0.30kg
0.66lbs



150 x 80 x 30mm
5.9 x 3.1 x 1.1"



1272

Miller camera platform side load with 1205 Miller+493
camera plate to suit AiR & DS



0.30kg
0.66lbs



150 x 80 x 30mm
5.9 x 3.1 x 1.1"



1274

Versa camera platform side load with 1201 Versa
camera plate to suit AiR, AiRV & DS



0.33kg
0.73lbs



90 x 120 x 15mm
3.54 x 4.72 x 0.60"



1276

Miller camera platform side load
to suit CompassX, CXV, ArtX Fluid Heads series includes
1205 Miller camera plate



0.29kg
0.64lbs



140 x 114 x 22 mm
5.5 x 4.5 x 0.9"



1278

Versa camera platform side load
to suit CompassX, CXV, ArtX Fluid Head series includes
1201 Versa camera plate (compatible with
Manfrotto 501 camera plate)



0.32kg
0.70lbs



140 x 114 x 22 mm
5.5 x 4.5 x 0.9"



1280

CiNX camera platform side load with 1065 CiNX
camera plate to suit CiNX 3, 5, 7 & AX 3, 5, 7



1.14kg
2.51lbs



260 x 150 x 23mm
10.23 x 5.90 x 0.90"



1282

CiNX 8/9 camera platform side load with 1065 CiNX
camera plate to suit CiNX 8, 9 & SKYX 8



1.32kg
2.90lbs



260 x 160 x 23mm
10.23 x 5.90 x 0.90"



ADAPTORS | ACCESSORIES

378

Ø100-75mm Tripod Bowl Adaptor
to suit 75 fluid heads



0.08kg
0.2lbs



Ø98 x 19mm



1214

QR Adaptor Plate compatible with #1205 camera
plate, to suit Solo-Q pod & flat base mounting



10kg
22.0lbs



0.33kg
0.71lbs



104 x 86 x 73mm
4.09 x 3.38 x 2.87"



493

1/4" Screw and Pin Carriage
to suit all camera plate with 1/4" screw & pin carriage



27.4 x 13.5mm
1.08 x 0.53"



Std 1/4"
and pin



1222

Arri mounting adaptor
to suit CompassX and ArtX fluid
heads series



3.0kg
6.6lbs



0.08kg
0.18lbs



38 x 24 x 40mm
1.5 x 0.94 x 1.6"



1260

Accessory mounting block kit
to suit ArrowX and CiNX 3/5/7 fluid head



3.0kg
6.6lbs



0.13kg
0.29lbs



40 x 25 x 55mm
1.6 x 1.0 x 2.2"



1270

Accessory mounting block kit (Arri)
to suit CompassX and ArtX Fluid Heads



3kg
6.6lbs



0.13kg
0.29lbs



1223

Front Box Adaptor
to suit CiNX 8 & 9 70 & SkyX 8 fluid heads



5.0kg
11.0lbs



0.36kg
0.79lbs



104 x 86 x 73mm
4.09 x 3.38 x 2.87"



1238

Serrated handle clamp extender (Miller)
to suit ArtX, CompassX, ArrowX, SkyX 8 and
CiNX 8 & 9 fluid head series



0.12kg
0.25lbs



Ø36 x 62mm
Ø1.4 x 2.4"



3290

Extension Tube Assembly
to suit Combo Live Pedestals



1.95kg
4.3lbs



315mm
12.4"



ADAPTORS | ACCESSORIES

2092

1/4" Accessory Adaptor
to suit AIR fluid head



0.012kg
0.026lbs



24 x 24 x 20mm
0.94 x 0.94 x 0.78"



1290

100mm Claw ball level
to suit ArtX and CiNX fluid head series



0.40kg
0.88lbs



100 x 27mm
(3.9 x 1.1")



232

75mm PTZ adaptor - 1/4" and 3/8" screws
to suit tripods and pedestals with 75mm bowl



0.13kg
0.28lbs



Ø70 x 80mm
Ø2.76 x 3.15"



PN14222

1/4" Camera screw (long)
to suit 1201 Versa camera plate



0.0054 kg
0.012lbs



PN14224

3/8" Screw to 1/4" Pin
to suit Versa 1201 Camera Plate



0.0052 kg
0.011lbs



319

MILLER HAMMOCK
to suit Solo-Q Tripods



0.1kg
0.22lbs



340 x 340 x 340mm
13.4" x 13.4" x 13.4"



1288

75mm Claw ball level
to suit ArtX fluid head series



0.30kg
0.66lbs



75 x 130mm
2.9 x 5.12"



1296

150mm Claw ball level
to suit ArtX and CiNX fluid head series



0.82kg
1.80lbs



150 x 27mm
(5.9 x 1.1")



1225

Mitchell base adaptor with clamp nut
to suit ArtX, ArrowX, CiNX, SkyX 8 and CiNX 8 & 9
fluid head series



0.82kg
1.8lbs



174mm
6.9"



233

100mm PTZ adaptor - 1/4" and 3/8" screws
to suit tripods and pedestals with 100mm bowl



0.13kg
0.28lbs



Ø70 x 80mm
Ø2.76 x 3.15"



PN14223

3/8" Camera screw (long)
to suit 1201 Versa camera plate



0.0066 kg
0.015lbs



315

Monopod Base Stand
to suit Solo-Q Pod



0.475 kg
1.05lbs



420x123mm
16.5" x 4.8"



ADAPTORS | ACCESSORIES

1320 100mm M10 Clamp Nut Long to suit 100mm CX/CXV heads


0.14kg
0.31lbs


Ø70 x 115mm
Ø2.76 x 4.53"



1324 75mm M10 Clamp Nut Short to suit Hi-hats, Flat Base Applications and Pedestals


0.11kg
0.23lbs


Ø70 x 70mm
Ø2.76 x 2.76"



1328 150mm M10 Clamp Nut Short to suit Skyx8, CiNX8/9 & 1296 Claw Ball Level


0.18 kg
0.39lbs


Ø87 x 70mm
Ø3.43 x 2.76"



1332 100mm M10 Clamp Nut Short to suit AX1/3/5/7, AFX3/5/7, Hi-Hats & Flat base Apps


0.13kg
0.28lbs


Ø70 x 80mm
Ø2.76 x 3.15"



3346 Mitchell, Centre Screw & Nut to suit Skyline 90 with Mitchell base


0.32kg
0.70lbs


Ø0.88 x 53mm
Ø3.46 x 2.09"



1322 100mm M10 Clamp Nut Short to suit Flat Base Applications & Sachtler 100mm heads


0.10kg
0.22lbs


Ø60 x 60mm
Ø2.36 x 2.36"



1326 75mm M10 Clamp Nut Long to suit AiRV, DS10/20, CX/CXV2/6/8, ARTX3/5, CiNX20/23


0.11 kg
0.25lbs


Ø50 x 105mm
Ø1.97 x 4.13"



1330 Mitchell Base Clamp Nut to suit 1225 Mitchell Base Adaptor


0.19 kg
0.42 lbs


Ø0.90 x 85mm
Ø3.54 x 3.35"



1334 Flat Base M10 Clamp Nut to suit Flat Base Applications & #1296 150 claw ball level kit & Dana Dolly adaptor kit


0.16 kg
0.35lbs


Ø90 x 50mm
Ø3.54 x 1.97"



1952 Extension Tube Assembly to suit Combo Pedestal 1960


1.13kg
2.5lbs


300mm
11.8"



CASES | BAGS

3518

LW baby tripod bag
to suit 455 Baby 2-stage tripod



0.6kg
1.3lbs



260 x 240 x 400mm
10.2 x 9.5 x 15.8"



3512

LW 1-stage tripod bag
to suit Toggle 1-stage tripod systems



1.4kg
3.1lbs



260 x 240 x 1070mm
10.2 x 9.5 x 42.1"



250 x 230 x 1050mm
9.8 x 9 x 41.1"



3514

LW 2-stage tripod bag
to suit Toggle 2-stage tripod systems



1.2kg
2.7lbs



260 x 240 x 930mm
10.2 x 9.5 x 36.6"



240 x 230 x 900mm
9.4 x 9 x 35.4"



3500

ArrowX 1 & 2-stage tripod bag to suit Sprinter II
1-stage & Toggle 1 & 2 stage tripod systems



4.8kg
10.6lbs



260 x 320 x 1110mm
10.2 x 12.6 x 43.7"



220 x 270 x 1080mm
8.7 x 10.6 x 42.1"



3502

ArrowX 2-stage tripod bag
to suit Sprinter II & Toggle 2-stage tripod systems



4.4kg
9.7lbs



260 x 320 x 960mm
10.2 x 12.6 x 37.8"



220 x 270 x 930 mm
8.7 x 10.6 x 36.6"



3516

Solo 75 2-stage tripod bag
to suit Solo 75 2-stage tripod systems



0.5kg
1.1lbs



165 x 850mm
6.15 x 33.5"



CASES | BAGS

3534

Shell case with wheels
to suit Sprinter II & HD 2-stage tripod systems



6.8kg
15.0lbs



270 x 340 x 1110mm
10.6 x 13.4 x 43.7"



220 x 270 x 1080mm
8.7 x 10.6 x 42.1"



3610

Miller smart case (short)
to suit Solo, Toggle & Sprinter 2-stage tripod systems



6.2kg
13.7lbs



285 x 336 x 971
11.2 x 13.2 x 38.2"



243 x 279 x 921mm
9.6 x 11.0 x 36.3"



3612

Miller smart case (medium)
to suit Toggle, Sprinter 1-stage & HD 2-stage tripod systems



6.8kg
14.9lbs



285 x 335 x 1128mm
11.2 x 13.2 x 44.4"



243 x 279 x 1081mm
9.6 x 11.0 x 42.6"



3615

Miller smart case (long)
to suit HD 1-stage tripod systems



7.7kg
17.0lbs



285 x 335 x 1330mm
11.2 x 13.2 x 52.4"



243 x 279 x 1128mm
9.6 x 11.0 x 50.4"



3620

Miller travel case (medium)
to suit Solo 2&3-stage, Toggle & Sprinter 2-stage tripod systems



5.3kg
11.7lbs



294 x 318 x 1022mm
11.0 x 12.5 x 40.3"



229 x 229 x 940mm
9.0 x 9.0 x 37.0"



3622

Miller travel case (short)
to suit Solo 2&3-stage, Toggle & Sprinter 2-stage tripod systems



6.8kg
15.0lbs



324 x 356 x 972mm
12.8 x 14.0 x 38.3"



279 x 279 x 864mm
11.0 x 11.0 x 34.0"



CASES | BAGS

3625

Miller travel case (long)
to suit Toggle & Sprinter 1-stage & HD 1&2-stage tripod systems



7.7kg
17.0lbs



324 x 356 x 1149mm
12.8 x 14.0 x 45.3"



279 x 279 x 1041mm
11.0 x 11.0 x 41.0"



396

Skycine head case (alloy)
to suit SkyX 8 & CiNX 8 & 9 fluid heads - APAC market only.



5.8kg
12.7lbs



320 x 350 x 410mm
12.5 x 13.7 x 15.1"



Custom foam
cut-out



3602

CiNX head case
to suit CiNX 3, 5 & 7 fluid head and accessories.



5.0kg
10.9lbs



543 x 419 x 218mm
(21.37 x 16.49 x 8.58")



Custom foam
cut-out



3348

Skyline 90 head case to suit Skyline 90 fluid head.
UK market only.




11.8kg
26.0lbs



550 x 390 x 520mm
21.7 x 15.4 x 20.5"



Custom foam
cut-out

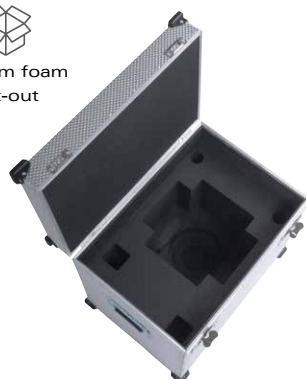

3380

Hexagonal case to suit 3350 HD tripod.




5.2kg
11.5lbs



280 x 780mm
11.0 x 30.7"



280 x 780mm
(11.0 x 30.7")

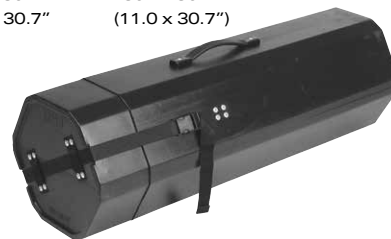

3382

Skyline 90 head case (alloy).
to suit Skyline 90 fluid head - APAC market only.




10.6kg
26.0lbs



550 x 390 x 520mm
21.7 x 15.4 x 20.5"



Custom foam
cut-out

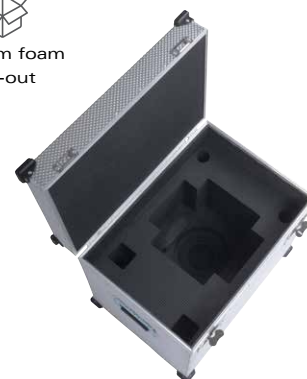

3384

Skyline 90 head case, with wheels and pull-out
handle to suit Skyline 90 fluid head.
USA market only.



16.0kg
35.2lb



653 x 653 x 463mm
25.7 x 25.7 x 18.25"



Custom foam
cut-out



KEY SYMBOLS

Payload range		Minimum width	
Weight		Maximum width	
Height range		Minimum height	
Bowl diameter		Maximum height	
Transport length		Maximum payload capacity	
Dolly footprint diameter		Dimensions	
Spreader diameter range		Inner dimensions	
		Attachment	

The Miller Camera Support Equipment Product Catalogue provides summary details of the components and options available for Miller system packages. For more detailed product descriptions, applications and technical information, please visit www.millertripods.com

The information contained in this brochure is correct at the time of printing. Miller accepts no responsibility for any errors that may affect the information herein and reserves the right to make changes without notice to the products and information contained within this brochure. For the latest product information visit our website.

AUSTRALIA

Miller Camera Support Equipment
6 Ross Place
Wetherill Park 2164 NSW, Sydney
Australia

P +61 2 9439 6377
sales.au@millertripods.com

EUROPE

Miller Fluid Heads Ltd.
12A, Shepperton Business Park
Govett Avenue, Shepperton
Middlesex, TW17 8BA
United Kingdom

P +44 (0) 1932 222 888
sales.eu@millertripods.com

USA

Miller Camera Support (LLC)
216 Little Falls Road (Unit 2),
Cedar Grove, New Jersey 07009
USA

P +1 (973) 857 8300
F +1 (973) 857 8188
sales.us@millertripods.com



Quality
ISO 9001
SAI GLOBAL
Australia only